



INTERIOR LIGHTING

WALL LIGHT MIRROR LIGHT
WALL WASHER CEILING LIGHT

Optical quality and manufacturing quality combine in high-level products: from scrupulous control of metal alloys and processing, to the selection of materials not subject to deterioration, to the use of the latest generation thermal interfaces, reliable, highperformance LEDs and optical trains of utmost optical quality: the technological mastery allows FINA TEHNO LED to manufacture products of the highest quality level.

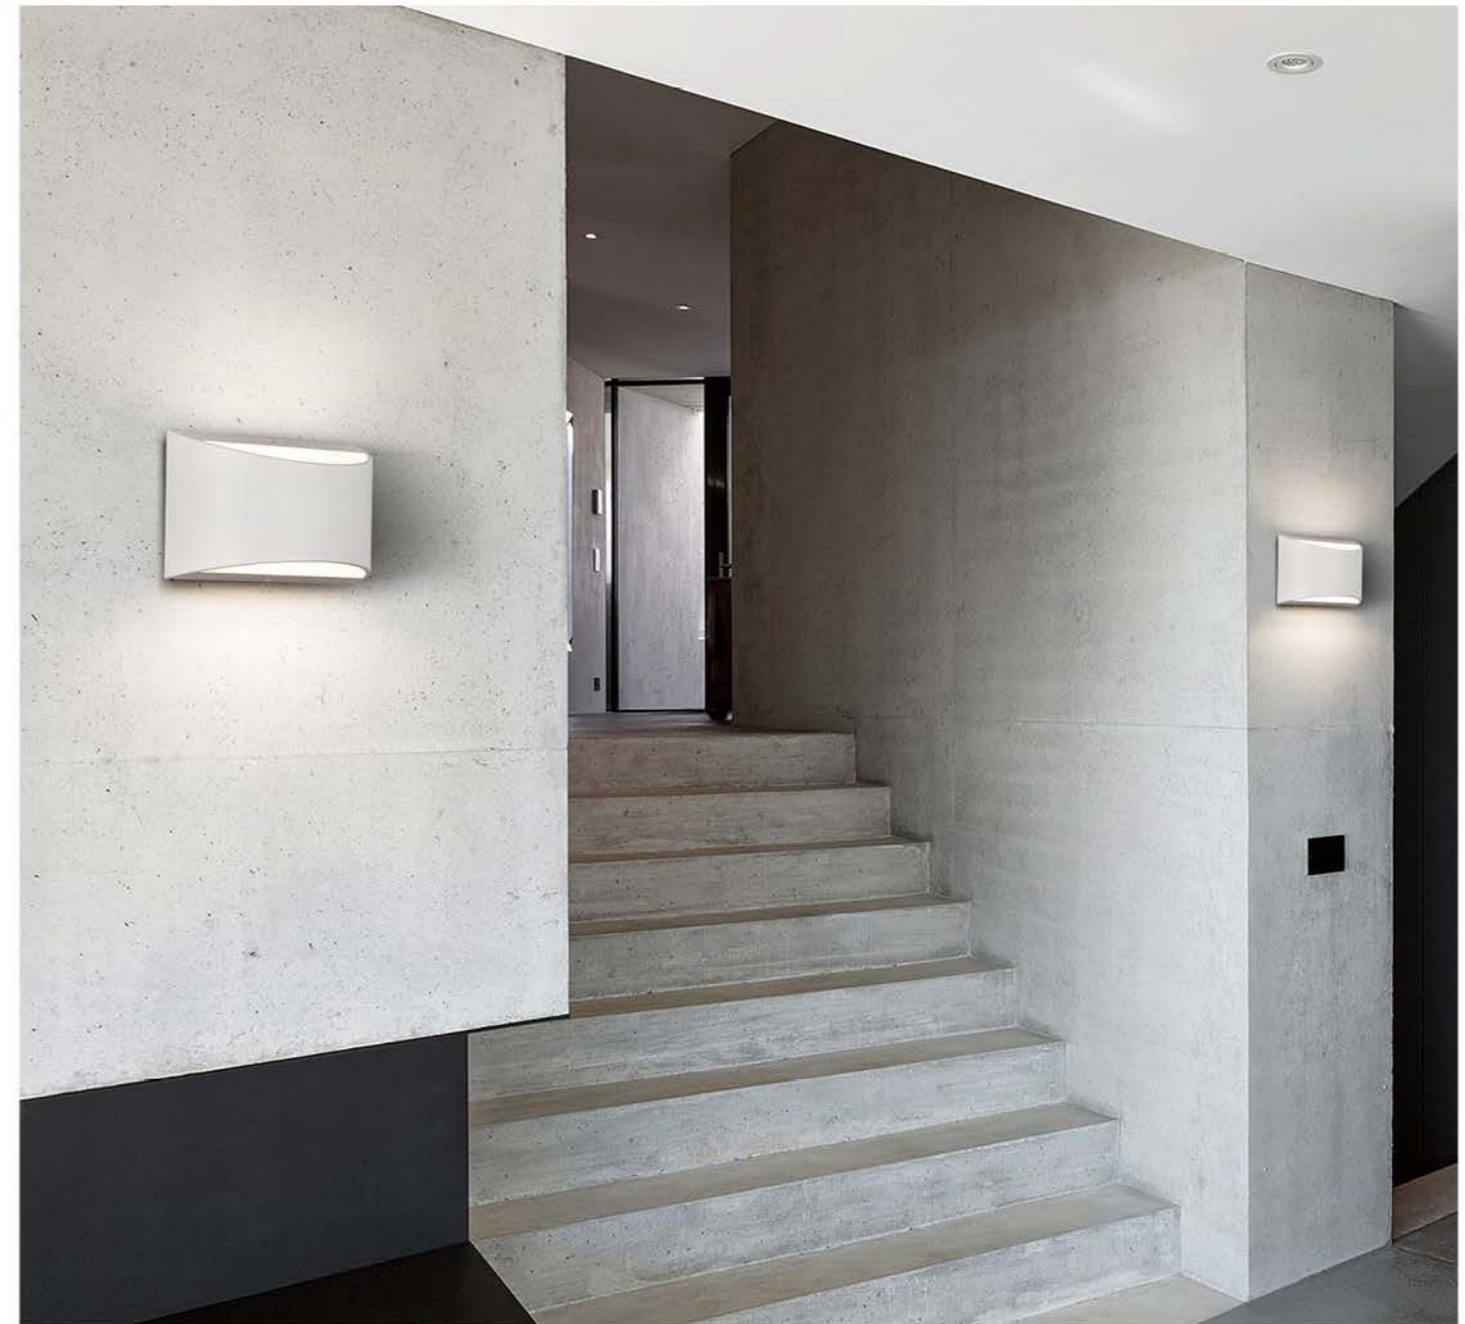


Dimensions



GW-9206

Lamp holder	G9
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum
Color	WTH/BLK
Waterproof Rate	IP20
Size (MM)Beam	W198.5 H128 D92.5



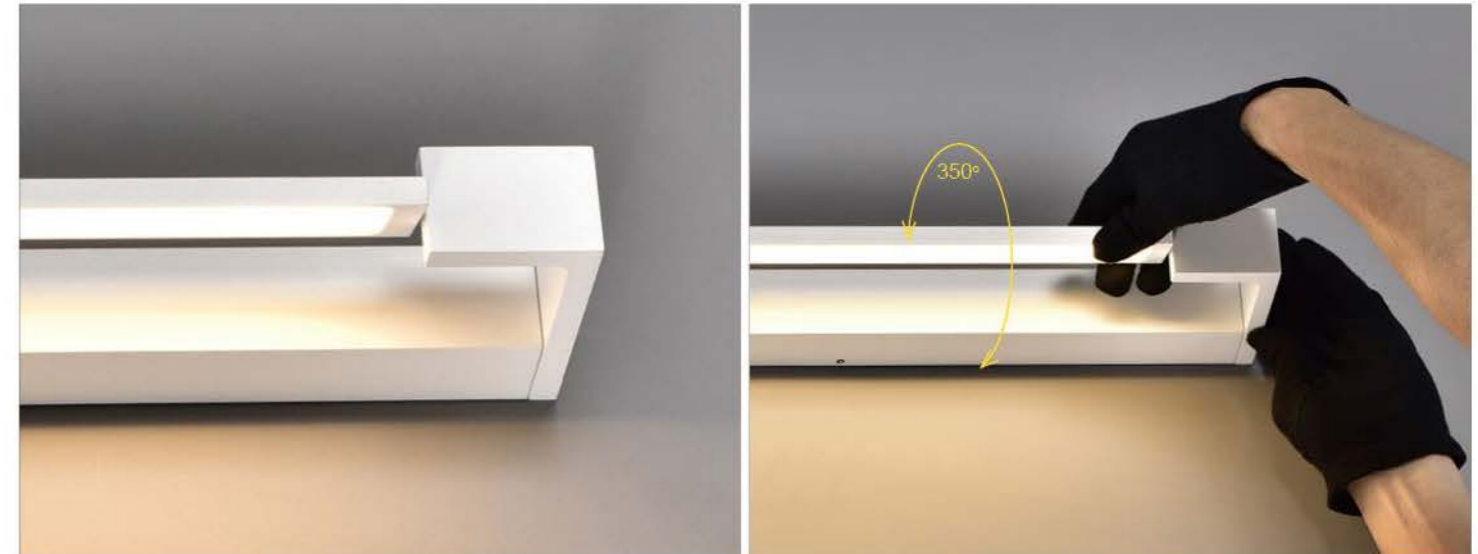

GW-1068/120

LED Chip	EPISTAR
CRI	>80
Watts	36W
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum+Acrylic
Color	WTH/BLK
Waterproof Rate	IP44
Size (MM)Beam	W1200 H100 D42
Beam Angel	350° adjustable



GW-1068/90

LED Chip	EPISTAR
CRI	>80
Watts	24W
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum+Acrylic
Color	WTH/BLK
Waterproof Rate	IP44
Size (MM)Beam	W900 H100 D42
Beam Angel	350° adjustable



GW-1068/60

LED Chip	EPISTAR
CRI	>80
Watts	18W
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum+Acrylic
Color	WTH/BLK
Waterproof Rate	IP44
Size (MM)Beam	W600 H100 D42
Beam Angel	350° adjustable




GW-1068/45

LED Chip	EPISTAR
CRI	>80
Watts	12W
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum+Acrylic
Color	WTH/BLK
Waterproof Rate	IP44
Size (MM)Beam	W450 H100 D42
Beam Angel	350° adjustable





Dimensions



GW-1088/90

LED Chip	EPISTAR
CRI	>80
Watts	27W
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum+Acrylic
Color	WTH/BLK
Waterproof Rate	IP44
Size (MM)Beam	W900 H40 D115
Beam Angel	180°



GW-1088/60

LED Chip	EPISTAR
CRI	>80
Watts	18W
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum+Acrylic
Color	WTH/BLK
Waterproof Rate	IP44
Size (MM)Beam	L600 W40 H115
Beam Angel	180°




GW-1088/45

LED Chip	EPISTAR
CRI	>80
Watts	12W
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum+Acrylic
Color	WTH/BLK
Waterproof Rate	IP44
Size (MM)Beam	W450 H40 D115
Beam Angel	180°





Dimensions



GW-065/1100

LED Chip	EPISTAR
CRI	>80
Watts	40W
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum+Acrylic
Color	WTH/BLK
Waterproof Rate	IP20
Size (MM)Beam	W1100 H90 D35
Beam Angel	360°



GW-065/830


LED Chip	EPISTAR
CRI	>80
Watts	30W
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum+Acrylic
Color	WTH/BLK
Waterproof Rate	IP20
Size (MM)Beam	W830 H90 D35
Beam Angel	360°



GW-065/610

LED Chip	EPISTAR
CRI	>80
Watts	20W
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum+Acrylic
Color	WTH/BLK
Waterproof Rate	IP20
Size (MM)Beam	W610 H90 D35
Beam Angel	360°




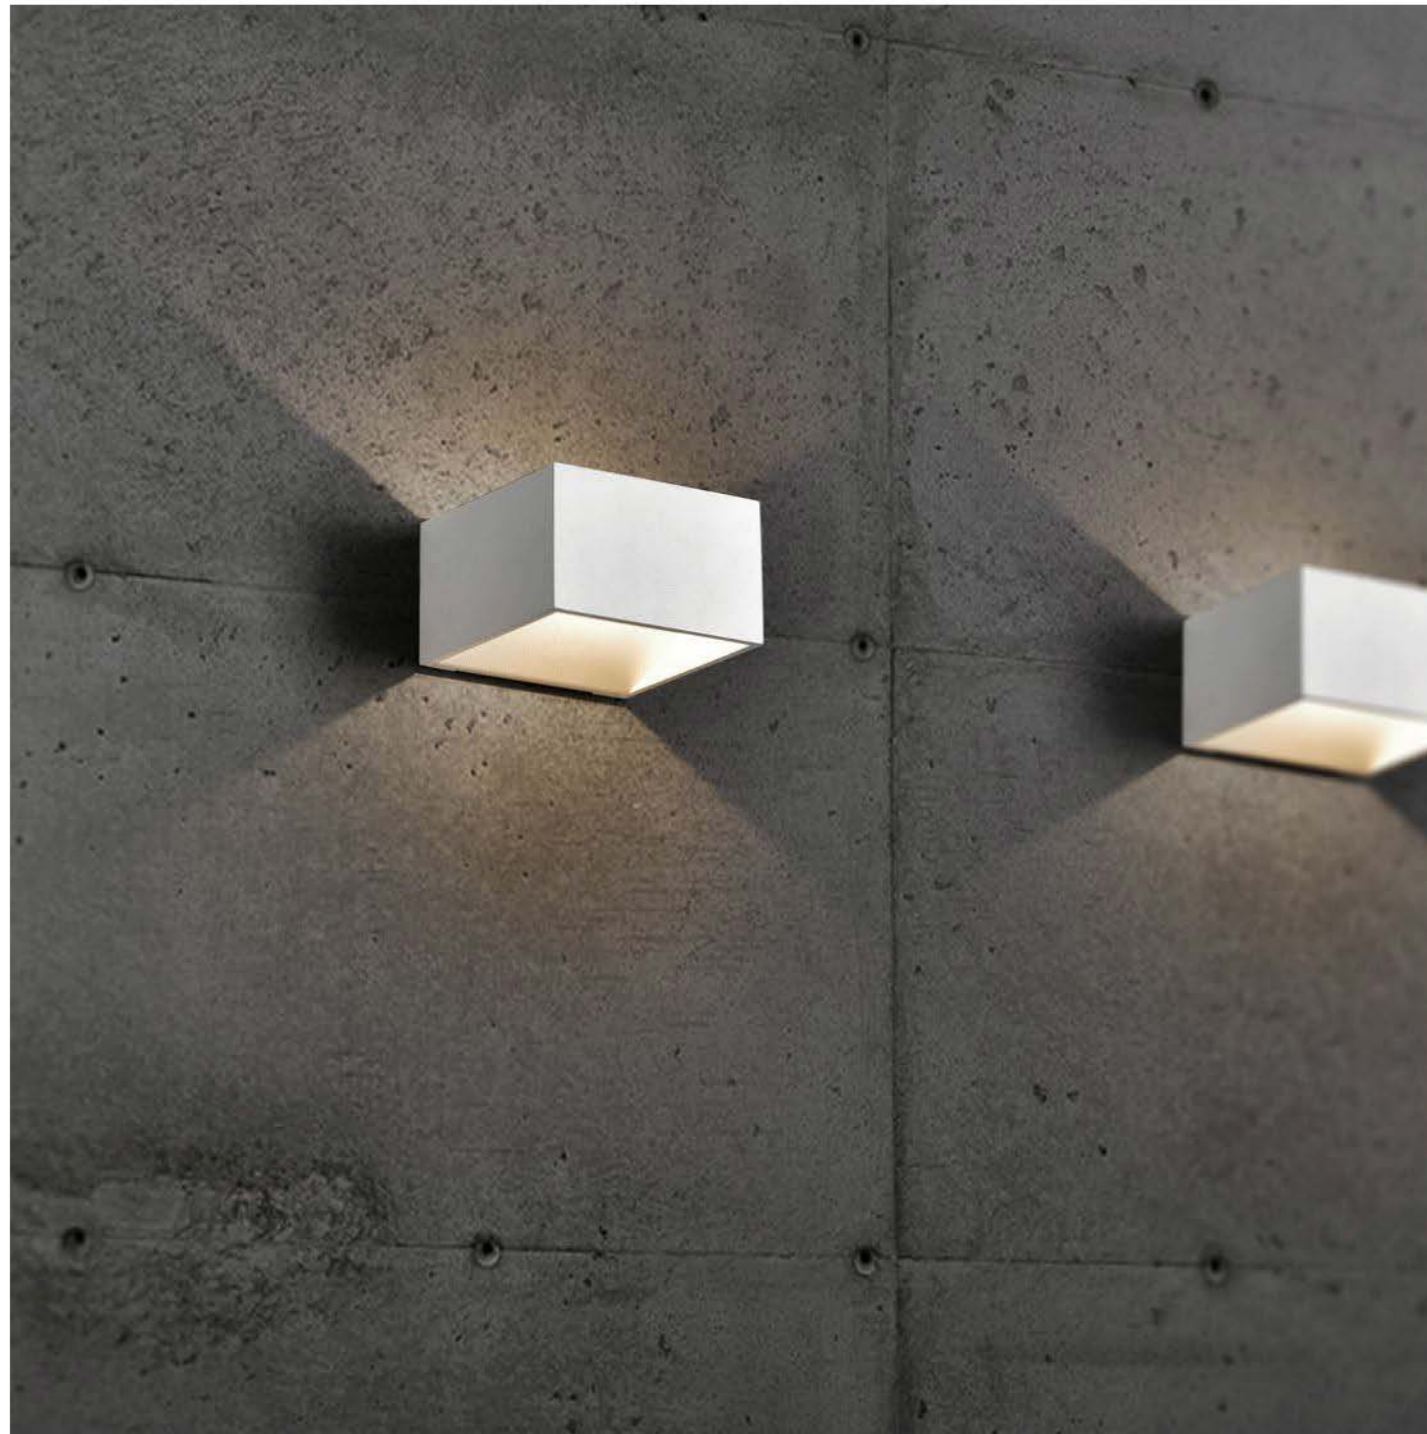

BLK WTH



Dimensions




GW-9008

LED Chip	Bridgelux
CRI	>80
Watts	7W
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum
Color	BLK/WHT
Waterproof Rate	Indoor
Size (MM)	W100 H100 D60
Beam Angel	120°



Dimensions




GW-1050

LED Chip	Bridgelux
CRI	>80
Watts	7W
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum
Color	WTH/BLK
Waterproof Rate	Indoor
Size (MM)	W160 H186 D63
Beam Angel	360°





Dimensions




GW-5809

LED Chip	Bridgelux
CRI	>80
Watts	6W
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum
Color	BLK/WHT
Waterproof Rate	Indoor
Size (MM)	W178 H163 D100
Beam Angel	360°



Dimensions



GW-6809L

LED Chip	EPISTAR
CRI	>80
Watts	36W
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum
Color	WTH/BLK/Grey/Coffee
Waterproof Rate	Indoor
Size (MM)	W400 H190 D53.5
Beam Angel	360°



GW-6809S

LED Chip	EPISTAR
CRI	>80
Watts	12W
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum
Color	WTH/BLK/Grey/Coffee
Waterproof Rate	Indoor
Size (MM)	W260 H125 D55
Beam Angel	360°






BLK WTH

GW-8507

LED Chip	Bridgelux
CRI	>80
Watts	10W
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum
Color	WTH/BLK
Waterproof Rate	Indoor
Size (MM)	W300 H215 D60
Beam Angel	150°

Dimensions




BLK WTH



GW-0613L

LED Chip	EPISTAR
CRI	>80
Watts	24W
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum
Color	WTH/BLK
Waterproof Rate	Indoor
Size (MM)	W425 H50 D115
Beam Angel	150°

Dimensions



GW-0613S

LED Chip	EPISTAR
CRI	>80
Watts	12W
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum
Color	WTH/BLK
Waterproof Rate	Indoor
Size (MM)	W260 H50 D115
Beam Angel	150°






Optical quality and manufacturing quality combine in high-level products: from scrupulous control of metal alloys and processing, to the selection of materials not subject to deterioration, to the use of the latest generation thermal interfaces, reliable, highperformance LEDs and optical trains of utmost optical quality: the technological mastery allows GAAPRO lighting to manufacture products of the highest quality level.



Dimensions



GW-1025

LED Chip	CREE
CRI	>80
Watts	6W
Voltage	110-220V
Color Temperature	3000K/4000K/6000K
Material	Aluminum
Color	WTH/BLK
Waterproof Rate	Indoor
Size (MM)	W130 H75 D138
Beam Angel	120°




GW-1025RGB

LED Chip	CREE
CRI	>80
Watts	6W
Voltage	110-220V
Color Temperature	RGB
Material	Aluminum
Color	WTH/BLK
Waterproof Rate	Indoor
Size (MM)	W130 H75 D138
Beam Angel	120°





Dimensions




GW-004-05

LED Chip	Bridgelux
CRI	>80
Watts	5W
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum
Color	WTH/BLK
Waterproof Rate	Indoor
Size (MM)Beam	W160 H110 D180
Beam Angel	350° adjustable
USB	DC 5V , 2A



Dimensions




GW-005-06

LED Chip	CREE & EPISTAR
CRI	>80
Watts	3W+3W
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum
Color	WTH/BLK
Waterproof Rate	Indoor
Size (MM)Beam	W160 H140 D110
Beam Angel	350° adjustable
USB	DC 5V , 2A






Dimensions



Dimensions



GW-003-09R

LED Chip **CREE & EPISTAR**
 CRI >80
 Watts 3W + 6W
 Voltage 110-220V
 Color Temperature 3000K/4000K/6000K
 Material Aluminum+Acrylic
 Color BLK/WHT/Grey
 Waterproof Rate IP20
 Size (MM) W150 H150 D132.5
 Beam Angel 360°




GW-003-09S

LED Chip **CREE & EPISTAR**
 CRI >80
 Watts 3W + 6W
 Voltage 110-220V
 Color Temperature 3000K/4000K/6000K
 Material Aluminum+Acrylic
 Color BLK/WHT/Grey
 Waterproof Rate IP20
 Size (MM) W150 H150 D132.5
 Beam Angel 360°






Optical quality and manufacturing quality combine in high-level products: from scrupulous control of metal alloys and processing, to the selection of materials not subject to deterioration, to the use of the latest generation thermal interfaces, reliable, highperformance LEDs and optical trains of utmost optical quality: the technological mastery allows GAAPRO lighting to manufacture products of the highest quality level.

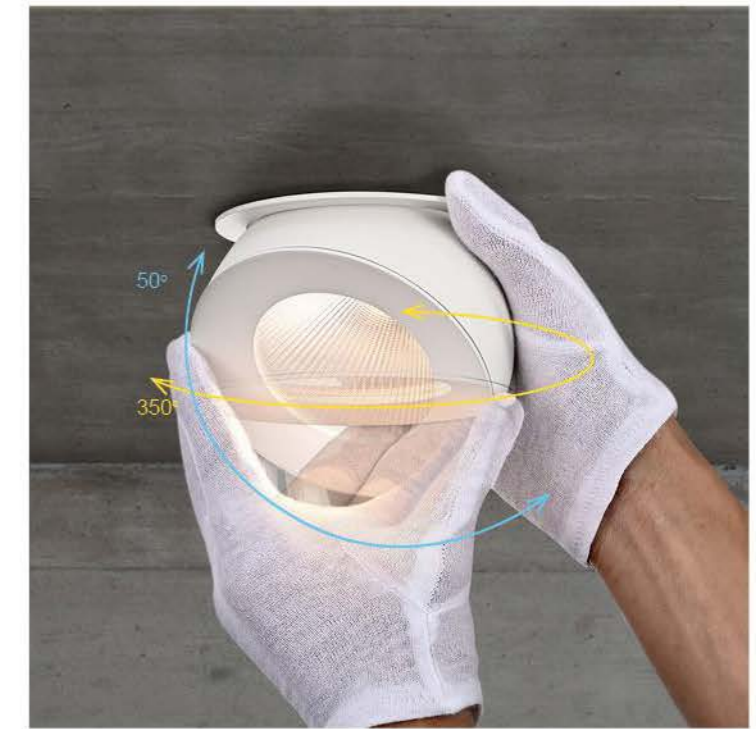

Dimensions




AJ-0103-15

- LED Chip **CREE**
- CRI >90
- PF >0.9
- Watts 15W
- Voltage 110-220V
- Color Temperature 3000K/4000K
- Material Aluminum
- Color WTH/BLK
- Waterproof Rate IP20
- Size (MM)Beam Ø110 H96.5
- Cut out(MM) Ø95
- Beam Angel 15° / 24° / 38°



Dimensions




AJ-0103-09

- LED Chip **CREE**
- CRI >90
- PF >0.9
- Watts 9W
- Voltage 110-220V
- Color Temperature 3000K/4000K
- Material Aluminum
- Color WTH/BLK
- Waterproof Rate IP20
- Size (MM)Beam Ø80 H81
- Cut out(MM) Ø75
- Beam Angel 18° / 24° / 36°





Dimensions



870112A

LED Chip	CREE
CRI	>90
PF	>0.9
Watts	10W
LUMENS	645lm
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum
Color	WTH/BLK
Waterproof Rate	IP20
Size (MM)Beam	Ø80 H100
Beam Angel	20° / 40° / 60°



870120A

LED Chip	CREE
CRI	>90
PF	>0.9
Watts	20W
LUMENS	1356lm
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum
Color	WTH/BLK
Waterproof Rate	IP20
Size (MM)Beam	Ø100 H100
Beam Angel	25° / 38° / 60°




870130A

LED Chip	CREE
CRI	>90
PF	>0.9
Watts	30W
LUMENS	2107lm
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum
Color	WTH/BLK
Waterproof Rate	IP20
Size (MM)Beam	Ø120 H100
Beam Angel	24° / 30° / 50°





Dimensions




GW-8601-10

LED Chip	EPistar
CRI	>80
PF	>0.9
Watts	10W
Lumens	606lm
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum
Color	WTH/BLK
Waterproof Rate	IP20
Size (MM)Beam	L100 W100 H110
Beam Angel	180°



Dimensions



GW-8602-20

LED Chip	EPistar
CRI	>80
PF	>0.9
Watts	20W
Lumens	1384lm
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum
Color	WTH/BLK
Waterproof Rate	IP20
Size (MM)Beam	L200 W100 H110
Beam Angel	180°

