










48V MAGNETIC TRACK LIGHT SYSTEM




**DEVELOPED FOR LOW VOLTAGE TRACKS
TO SATISFY ALL TECHNICAL AND DESIGN NEEDS**

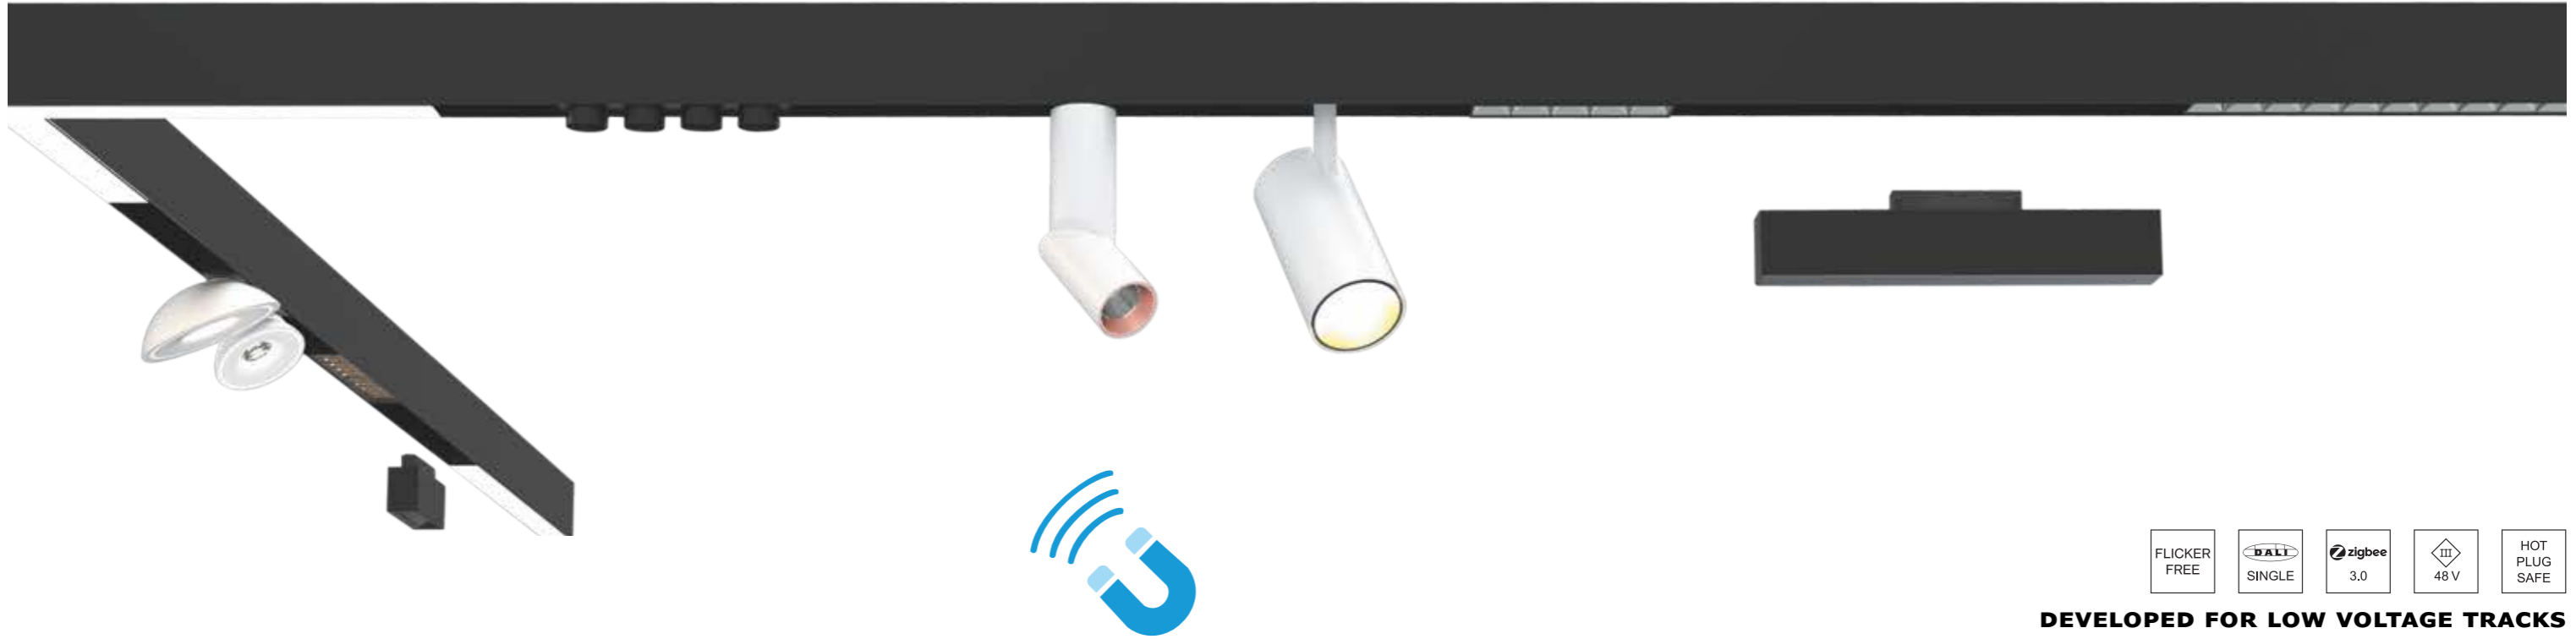

48V MAGNETIC TRACK LIGHT SYSTEM

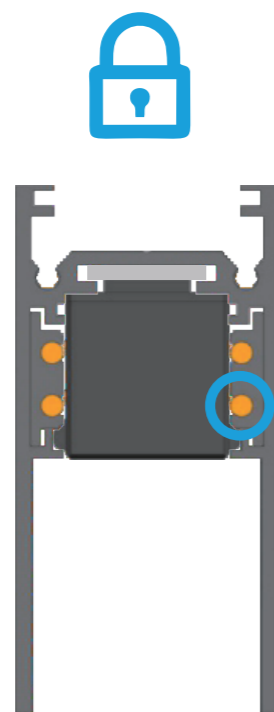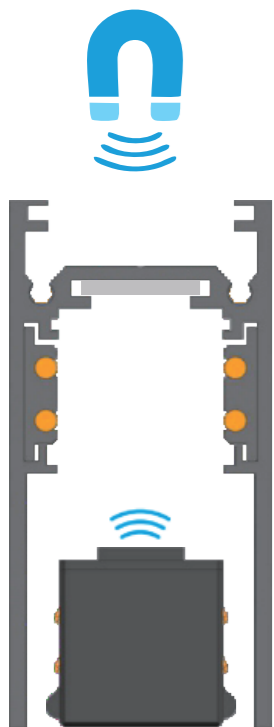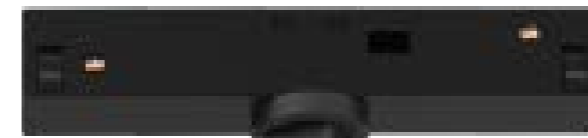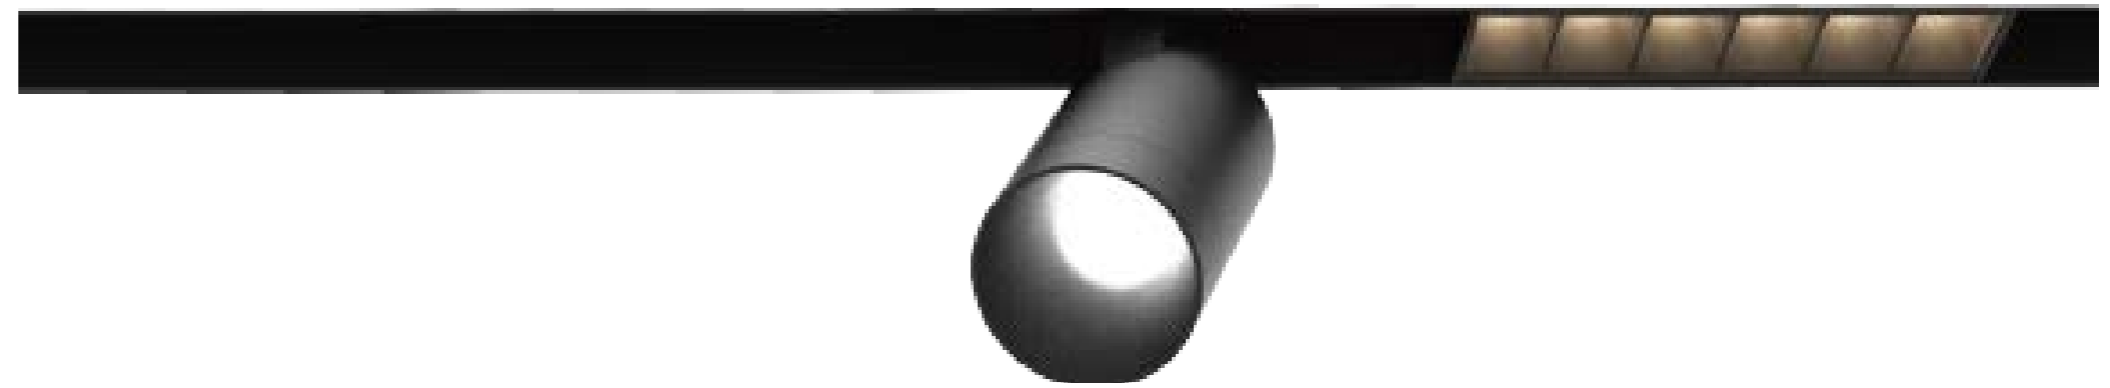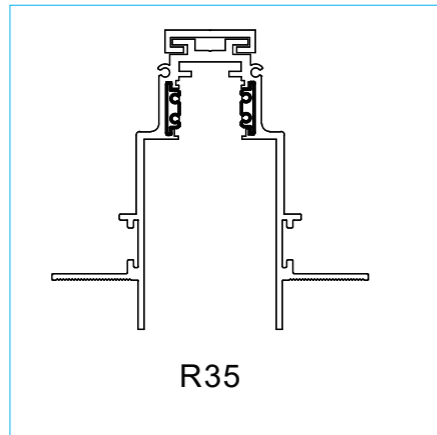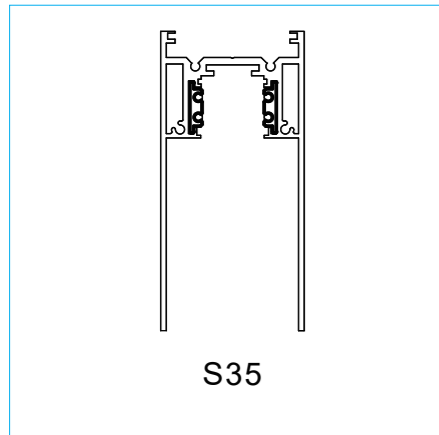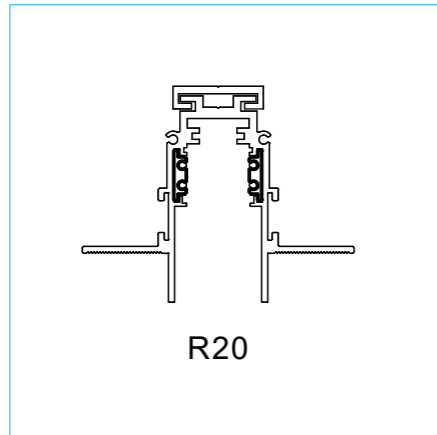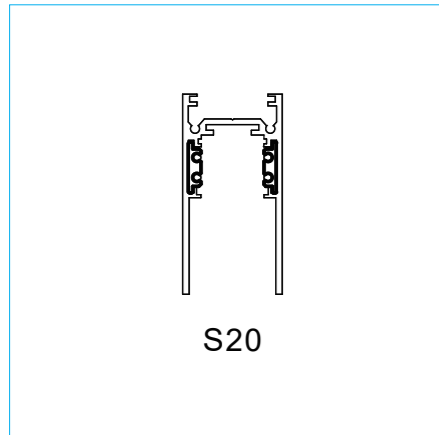

4 wire

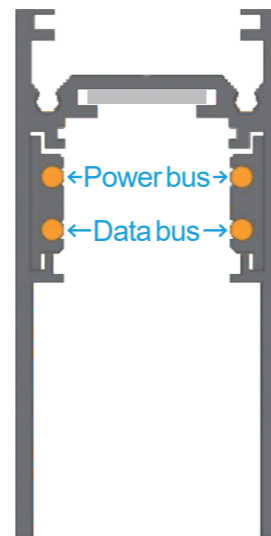



MODEL NO.	M20-BL9	INPUT	DC 48V
POWER	9W	FITTING COLOUR	<input type="checkbox"/> <input checked="" type="checkbox"/>
LUMEN	80LM/W	OPTION COLOUR	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
BEAM ANGLE	20° 40° 60°	CCT.	3000K 4000K 5000K
CRI	Ra80/Ra95	DIMMING OPTION	



MODEL NO.	M20-TW	INPUT	DC 48V
POWER	9W	FITTING COLOUR	<input type="checkbox"/> <input checked="" type="checkbox"/>
LUMEN	70LM/W	OPTION COLOUR	/
BEAM ANGLE	20° 40° 60°	CCT.	3000K 4000K 5000K
CRI	Ra80/Ra95	DIMMING OPTION	



MODEL NO.	M20-DS9	INPUT	DC 48V
POWER	9W	FITTING COLOUR	<input type="checkbox"/> <input checked="" type="checkbox"/>
LUMEN	70LM/W	OPTION COLOUR	<input type="checkbox"/> <input checked="" type="checkbox"/>
BEAM ANGLE	20° 40° 60°	CCT.	3000K 4000K 5000K
CRI	Ra80/Ra95	DIMMING OPTION	




MODEL NO. M20-DS12 INPUT DC 48V

POWER 12W FITTING COLOUR

LUMEN 70LM/W OPTION COLOUR

BEAM ANGLE 15° 25° 38° 60° CCT. 3000K 4000K 5000K

CRI Ra80/Ra95 DIMMING OPTION 




MODEL NO. M20-DFS60 INPUT DC 48V

POWER 14W FITTING COLOUR

LUMEN 80LM/W OPTION COLOUR /

BEAM ANGLE 120° CCT. 3000K 4000K 5000K

CRI Ra80/Ra95 DIMMING OPTION 



MODEL NO. M20-DFS30 INPUT DC 48V

POWER 7.4W FITTING COLOUR

LUMEN 80LM/W OPTION COLOUR /

BEAM ANGLE 120° CCT. 3000K 4000K 5000K

CRI Ra80/Ra95 DIMMING OPTION 




MODEL NO. M20-LB6 INPUT DC 48V

POWER 6W FITTING COLOUR

LUMEN 80LM/W OPTION COLOUR

BEAM ANGLE 38° CCT. 3000K 4000K 5000K

CRI Ra80/Ra95 DIMMING OPTION 



MODEL NO. M20-LB12 INPUT DC 48V

POWER 12W FITTING COLOUR

LUMEN 80LM/W OPTION COLOUR

BEAM ANGLE 38° CCT. 3000K 4000K 5000K

CRI Ra80/Ra95 DIMMING OPTION 



MODEL NO. M20-TL10 INPUT DC 48V

POWER 10W FITTING COLOUR

LUMEN 80LM/W OPTION COLOUR

BEAM ANGLE 15° 24° 36° CCT. 3000K 4000K 5000K

CRI Ra80/Ra95 DIMMING OPTION 





MODEL NO.	M20-TL15	INPUT	DC 48V
POWER	15W	FITTING COLOUR	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>
LUMEN	80LM/W	OPTION COLOUR	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
BEAM ANGLE	15° 24° 36°	CCT.	3000K 4000K 5000K
CRI	Ra80/Ra95	DIMMING OPTION	



MODEL NO.	M20-TL20	INPUT	DC 48V
POWER	20W	FITTING COLOUR	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>
LUMEN	80LM/W	OPTION COLOUR	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
BEAM ANGLE	15° 24° 36°	CCT.	3000K 4000K 5000K
CRI	Ra80/Ra95	DIMMING OPTION	



MODEL NO.	M20-LBM5 M20-LBM10	INPUT	DC 48V
POWER	10W/20W	FITTING COLOUR	<input checked="" type="checkbox"/>
LUMEN	80LM/W	OPTION COLOUR	<input checked="" type="checkbox"/>
BEAM ANGLE		CCT.	3000K 4000K 5000K
CRI	Ra80/Ra95	DIMMING OPTION	





MODEL NO.	M35-DS9	INPUT	DC 48V
POWER	9W	FITTING COLOUR	<input type="checkbox"/> <input checked="" type="checkbox"/>
LUMEN	70LM/W	OPTION COLOUR	<input type="checkbox"/> <input checked="" type="checkbox"/>
BEAM ANGLE	20° 40° 60°	CCT.	3000K 4000K 5000K
CRI	Ra80/Ra95	DIMMING OPTION	




MODEL NO.	M35-DS12	INPUT	DC 48V
POWER	12W	FITTING COLOUR	<input type="checkbox"/> <input checked="" type="checkbox"/>
LUMEN	70LM/W	OPTION COLOUR	<input type="checkbox"/> <input checked="" type="checkbox"/>
BEAM ANGLE	15° 25° 38° 60°	CCT.	3000K 4000K 5000K
CRI	Ra80/Ra95	DIMMING OPTION	




MODEL NO.	M35-TW	INPUT	DC 48V
POWER	9W	FITTING COLOUR	<input type="checkbox"/> <input checked="" type="checkbox"/>
LUMEN	70LM/W	OPTION COLOUR	<input type="checkbox"/>
BEAM ANGLE	20° 40° 60°	CCT.	3000K 4000K 5000K
CRI	Ra80/Ra95	DIMMING OPTION	



MODEL NO.	M35-BL9W	INPUT	DC 48V
POWER	9W	FITTING COLOUR	<input type="checkbox"/> <input checked="" type="checkbox"/>
LUMEN	80LM/W	OPTION COLOUR	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
BEAM ANGLE	20° 40° 60°	CCT.	3000K 4000K 5000K
CRI	Ra80/Ra95	DIMMING OPTION	




MODEL NO.	M35-DFS60	INPUT	DC 48V
POWER	24W	FITTING COLOUR	<input checked="" type="checkbox"/>
LUMEN	80LM/W	OPTION COLOUR	/
BEAM ANGLE	120°	CCT.	3000K 4000K 5000K
CRI	Ra80/Ra95	DIMMING OPTION	




MODEL NO.	M35-DFS90°	INPUT	DC 48V
POWER	24W	FITTING COLOUR	<input checked="" type="checkbox"/>
LUMEN	80LM/W	OPTION COLOUR	/
BEAM ANGLE	120°	CCT.	3000K 4000K 5000K
CRI	Ra80/Ra95	DIMMING OPTION	






MODEL NO.	M35-DFS30	INPUT	DC 48V
POWER	24W	FITTING COLOUR	■
LUMEN	80LM/W	OPTION COLOUR	/
BEAM ANGLE	120°	CCT.	3000K 4000K 5000K
CRI	Ra80/Ra95	DIMMING OPTION	DALI 2.4G




MODEL NO.	M35-SP4	INPUT	DC 48V
POWER	8W	FITTING COLOUR	■
LUMEN	80LM/W	OPTION COLOUR	□ ■ ■ ■
BEAM ANGLE	10° 20° 30° 40° 60°	CCT.	3000K 4000K 5000K
CRI	Ra80/Ra95	DIMMING OPTION	DALI 2.4G




MODEL NO.	M35-LB5	INPUT	DC 48V
POWER	10W	FITTING COLOUR	■
LUMEN	80LM/W	OPTION COLOUR	■
BEAM ANGLE	15° 30° 45°	CCT.	3000K 4000K 5000K
CRI	Ra80/Ra95	DIMMING OPTION	DALI 2.4G







MODEL NO.	M35-LB10	INPUT	DC 48V
POWER	20W	FITTING COLOUR	■
LUMEN	80LM/W	OPTION COLOUR	■
BEAM ANGLE	15° 30° 45°	CCT.	3000K 4000K 5000K
CRI	Ra80/Ra95	DIMMING OPTION	




MODEL NO.	M35-SL5	INPUT	DC 48V
POWER	10W	FITTING COLOUR	■
LUMEN	80LM/W	OPTION COLOUR	■
BEAM ANGLE	12° 20° 34° 48° S55*55 R40*65 F40° F60° Wall washer	CCT.	3000K 4000K 5000K
CRI	Ra80/Ra95	DIMMING OPTION	



MODEL NO.	M35-SL10	INPUT	DC 48V
POWER	20W	FITTING COLOUR	■
LUMEN	80LM/W	OPTION COLOUR	■
BEAM ANGLE	12° 20° 34° 48° S55*55 R40*65 F40° F60° Wall washer	CCT.	3000K 4000K 5000K
CRI	Ra80/Ra95	DIMMING OPTION	

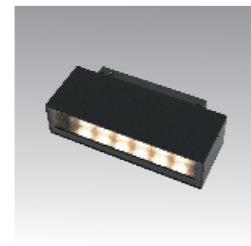

MODEL NO.	M35-SLP5	INPUT	DC 48V
POWER	12W	FITTING COLOUR	■
LUMEN	80LM/W	OPTION COLOUR	/
BEAM ANGLE	Wall washer	CCT.	3000K 4000K 5000K
CRI	Ra80/Ra95	DIMMING OPTION	



MODEL NO.	M35-SLP10	INPUT	DC 48V
POWER	20W	FITTING COLOUR	■
LUMEN	80LM/W	OPTION COLOUR	/
BEAM ANGLE	Wall washer	CCT.	3000K 4000K 5000K
CRI	Ra80/Ra95	DIMMING OPTION	



MODEL NO.	M35-TL10	INPUT	DC 48V
POWER	10W	FITTING COLOUR	□ ■ ■
LUMEN	80LM/W	OPTION COLOUR	□ ■ ■ ■
BEAM ANGLE	15° 24° 36°	CCT.	3000K 4000K 5000K
CRI	Ra80/Ra95	DIMMING OPTION	





MODEL NO.	M35-TL15	INPUT	DC 48V
POWER	15W	FITTING COLOUR	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>
LUMEN	80LM/W	OPTION COLOUR	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
BEAM ANGLE	15° 24° 36°	CCT.	3000K 4000K 5000K
CRI	Ra80/Ra95	DIMMING OPTION	




MODEL NO.	M35-TL20	INPUT	DC 48V
POWER	20W	FITTING COLOUR	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>
LUMEN	80LM/W	OPTION COLOUR	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
BEAM ANGLE	15° 24° 36°	CCT.	3000K 4000K 5000K
CRI	Ra80/Ra95	DIMMING OPTION	




MODEL NO.	M35-LBM5 M35-LBM10	INPUT	DC 48V
POWER	10/20W	FITTING COLOUR	<input checked="" type="checkbox"/>
LUMEN	80LM/W	OPTION COLOUR	<input checked="" type="checkbox"/>
BEAM ANGLE	15° 30° 45°	CCT.	3000K 4000K 5000K
CRI	Ra80/Ra95	DIMMING OPTION	




S20 MAGNETIC TRACK

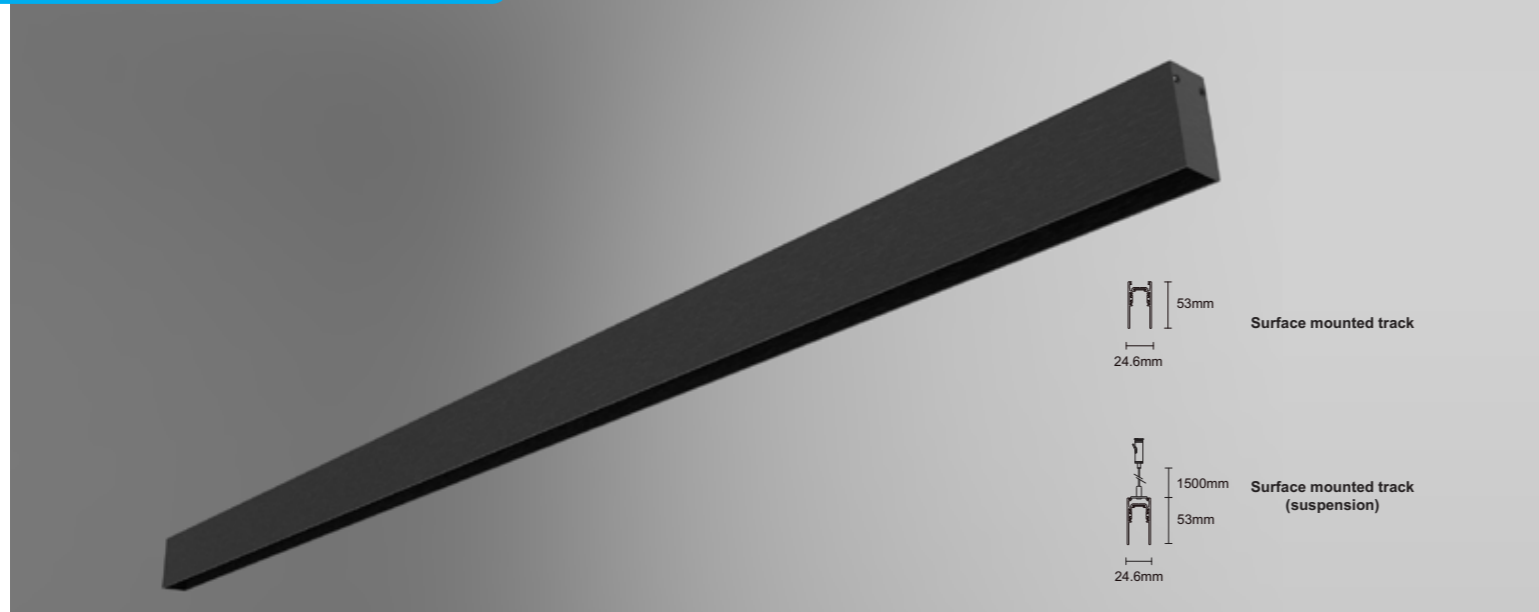


Input voltage	DC48V
Max. load	up to 300W
Max. track length	up to 50m
Track sections	1m / 2m / 3m
Available colour	Satin Black
Certification	CE / ROHS

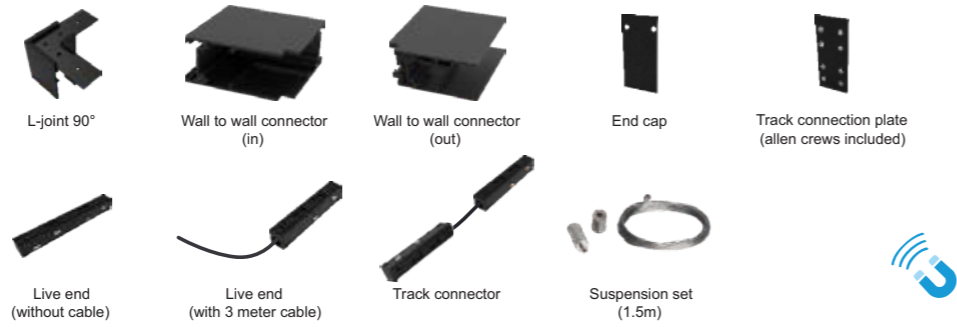

S35 MAGNETIC TRACK

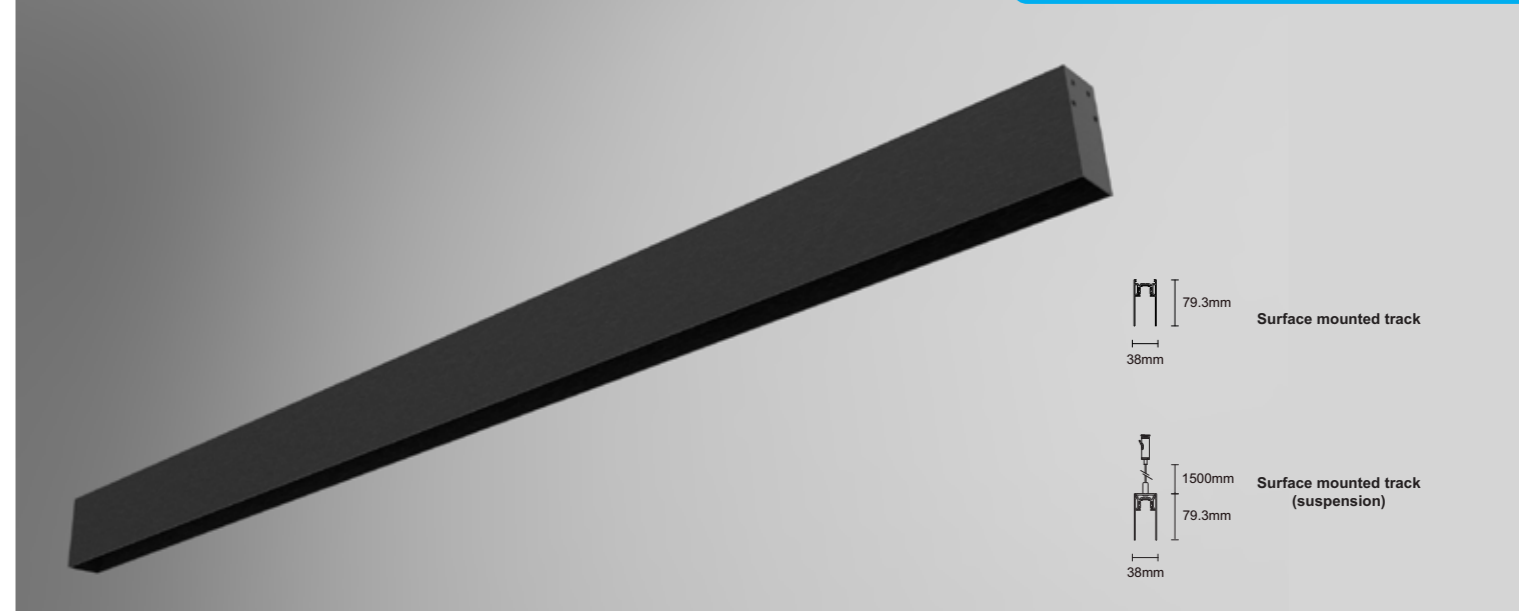


Input voltage	DC48V
Max. load	up to 300W
Max. track length	up to 50m
Track sections	1m / 2m / 3m
Available colour	Satin Black
Certification	CE / ROHS

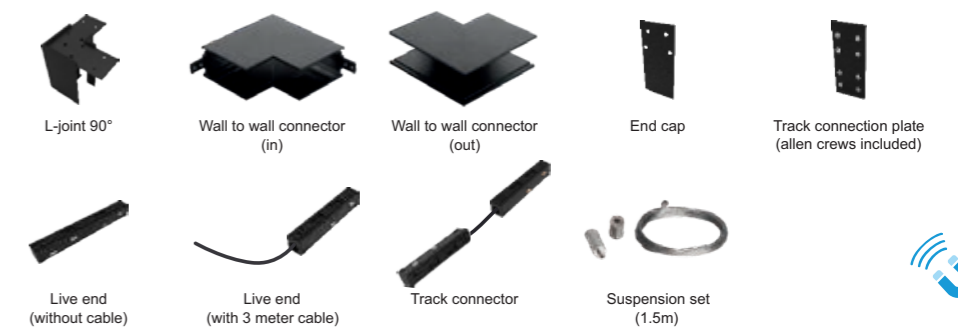


R20 MAGNETIC TRACK




Input voltage	DC48V
Max. load	up to 300W
Max. track length	up to 50m
Track sections	1m / 2m / 3m
Available colour	Oxidating Black
Certification	CE / ROHS

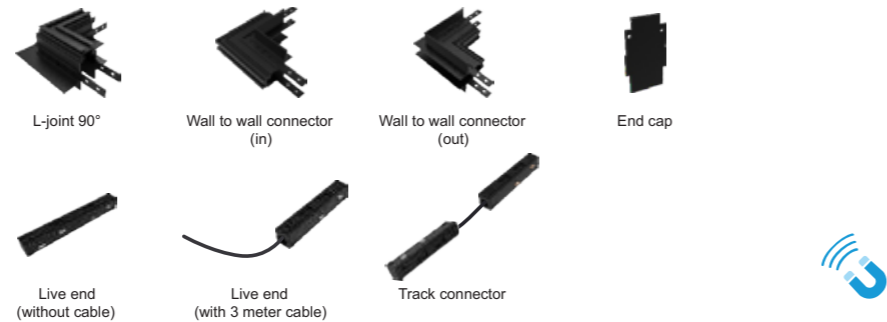

R35 MAGNETIC TRACK

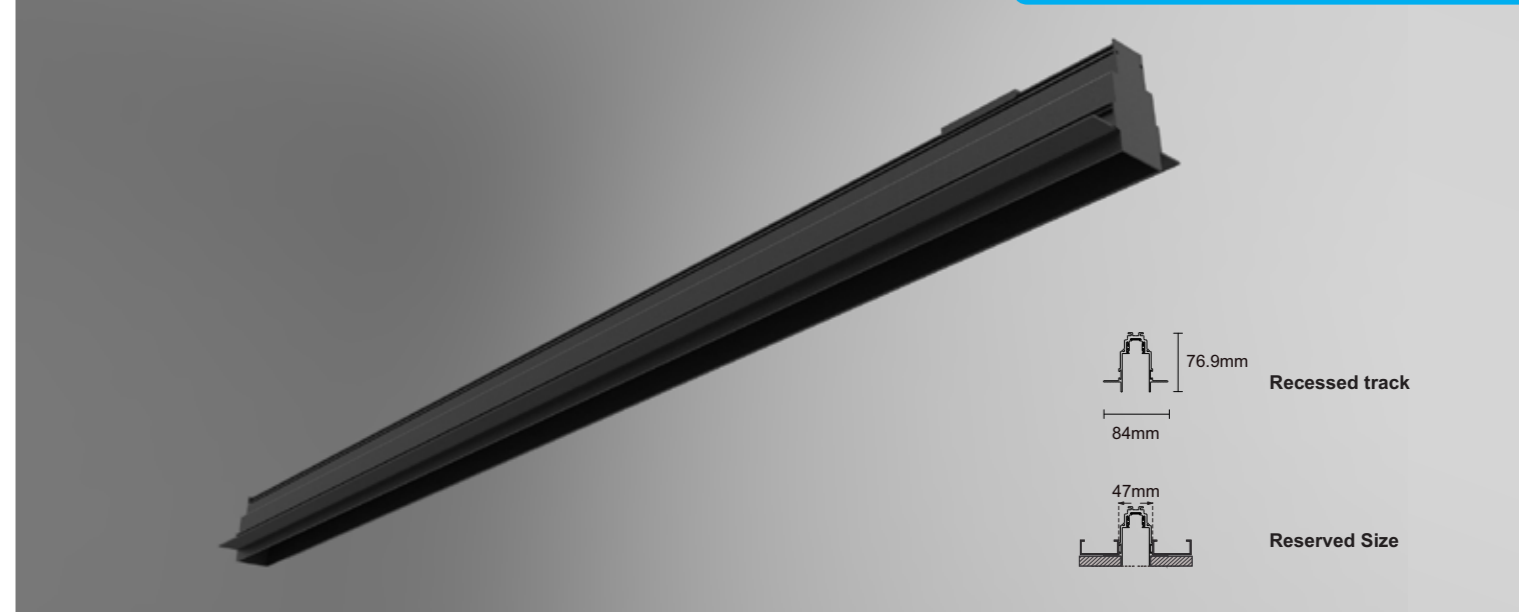

Input voltage	DC48V
Max. load	up to 300W
Max. track length	up to 50m
Track sections	1m / 2m / 3m
Available colour	Oxidating Black
Certification	CE / ROHS

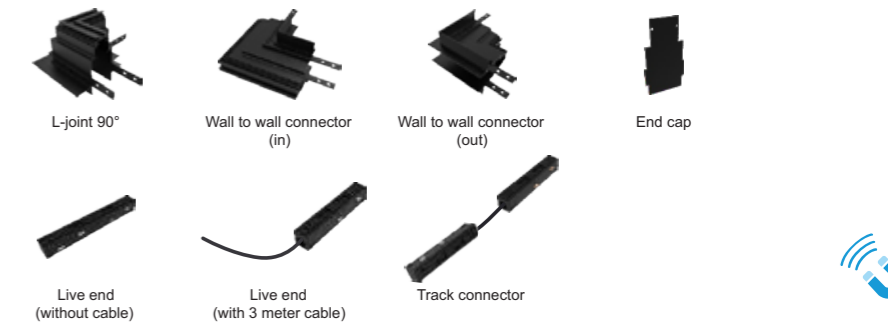




Magnetic Track Slim

TRACKS

LUMINAIRES

MOUNTING OPTIONS

COLORS

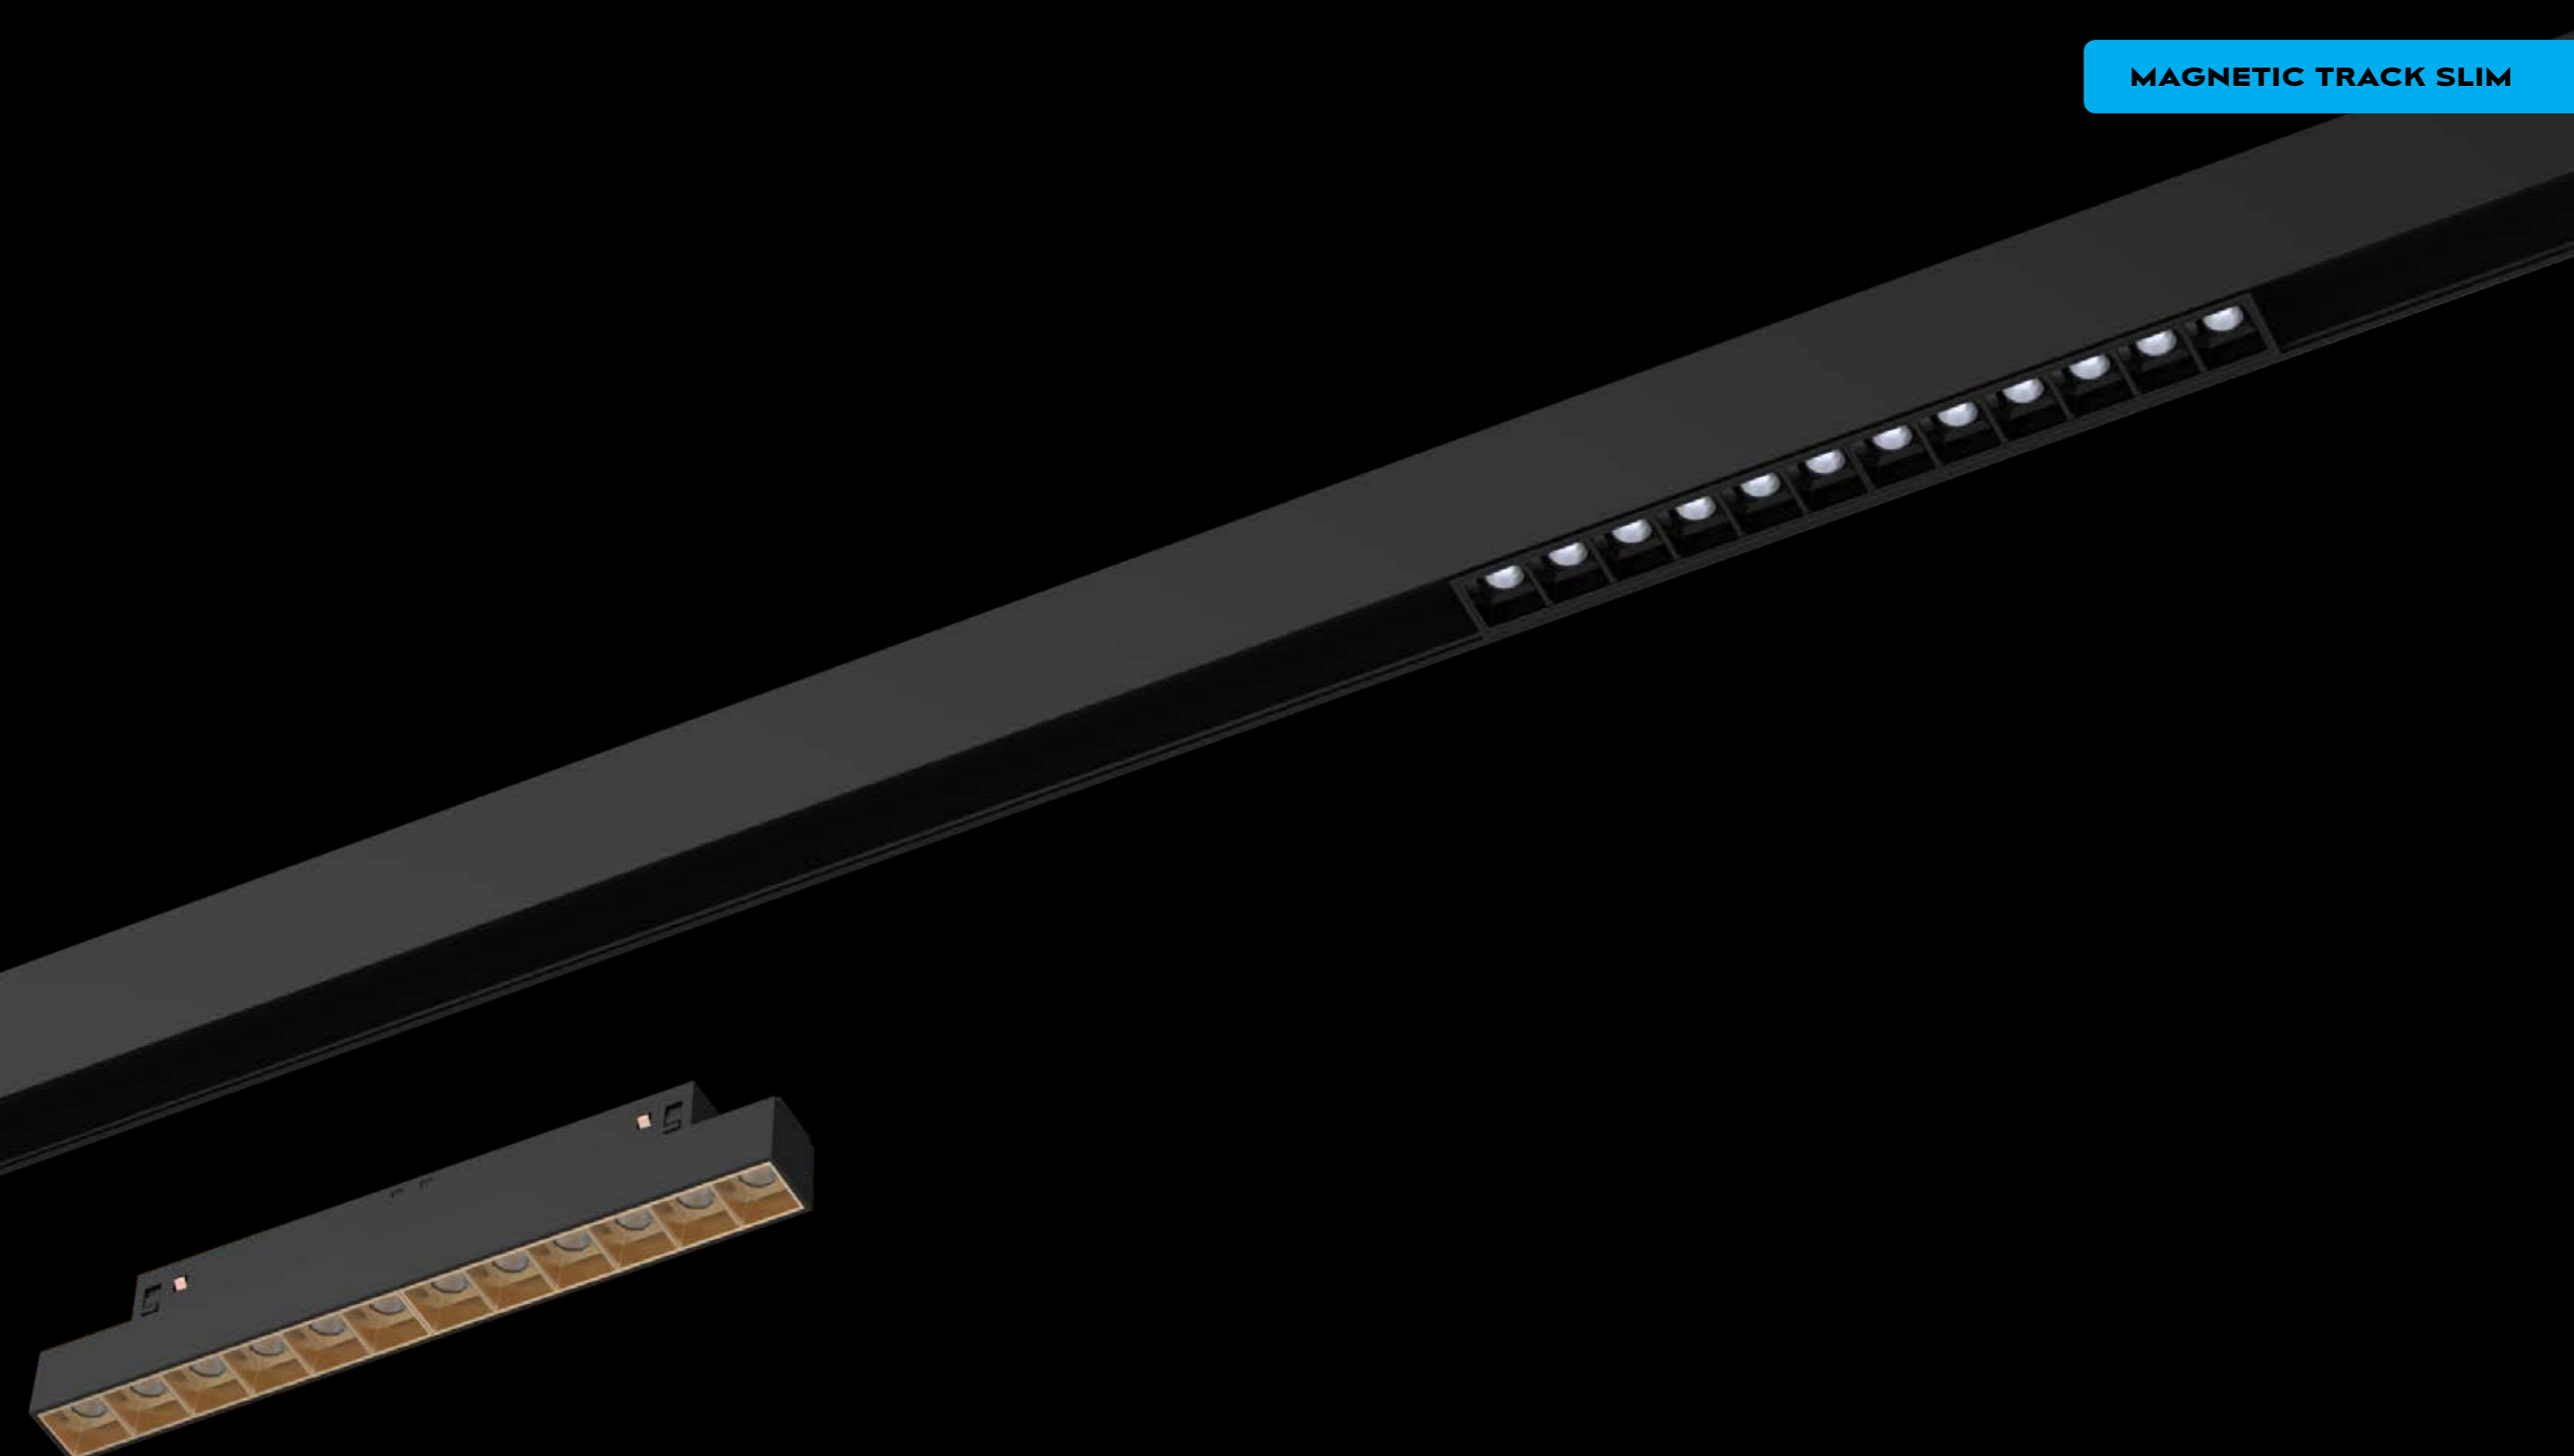

Magnetic Track Slim combines unornamented aesthetics with a multitude of configuration options and effortless installation. The outcome is an ecosystem of quality components perfect for spaces where constant flexibility and high performance are required.




SLIM RAIL - TYPE 1




DEEP RAIL - TYPE 2




Two profile depths,
Three mounting options

 TYPE 1
SLIM-SUSPENSION




 TYPE 2
DEEP-SUSPENSION





 TYPE 1
SLIM-CEILING





 TYPE 2
DEEP-CEILING




 TYPE 1
SLIM-RECESSED



 TYPE 2
DEEP-RECESSED



SLIM RAIL

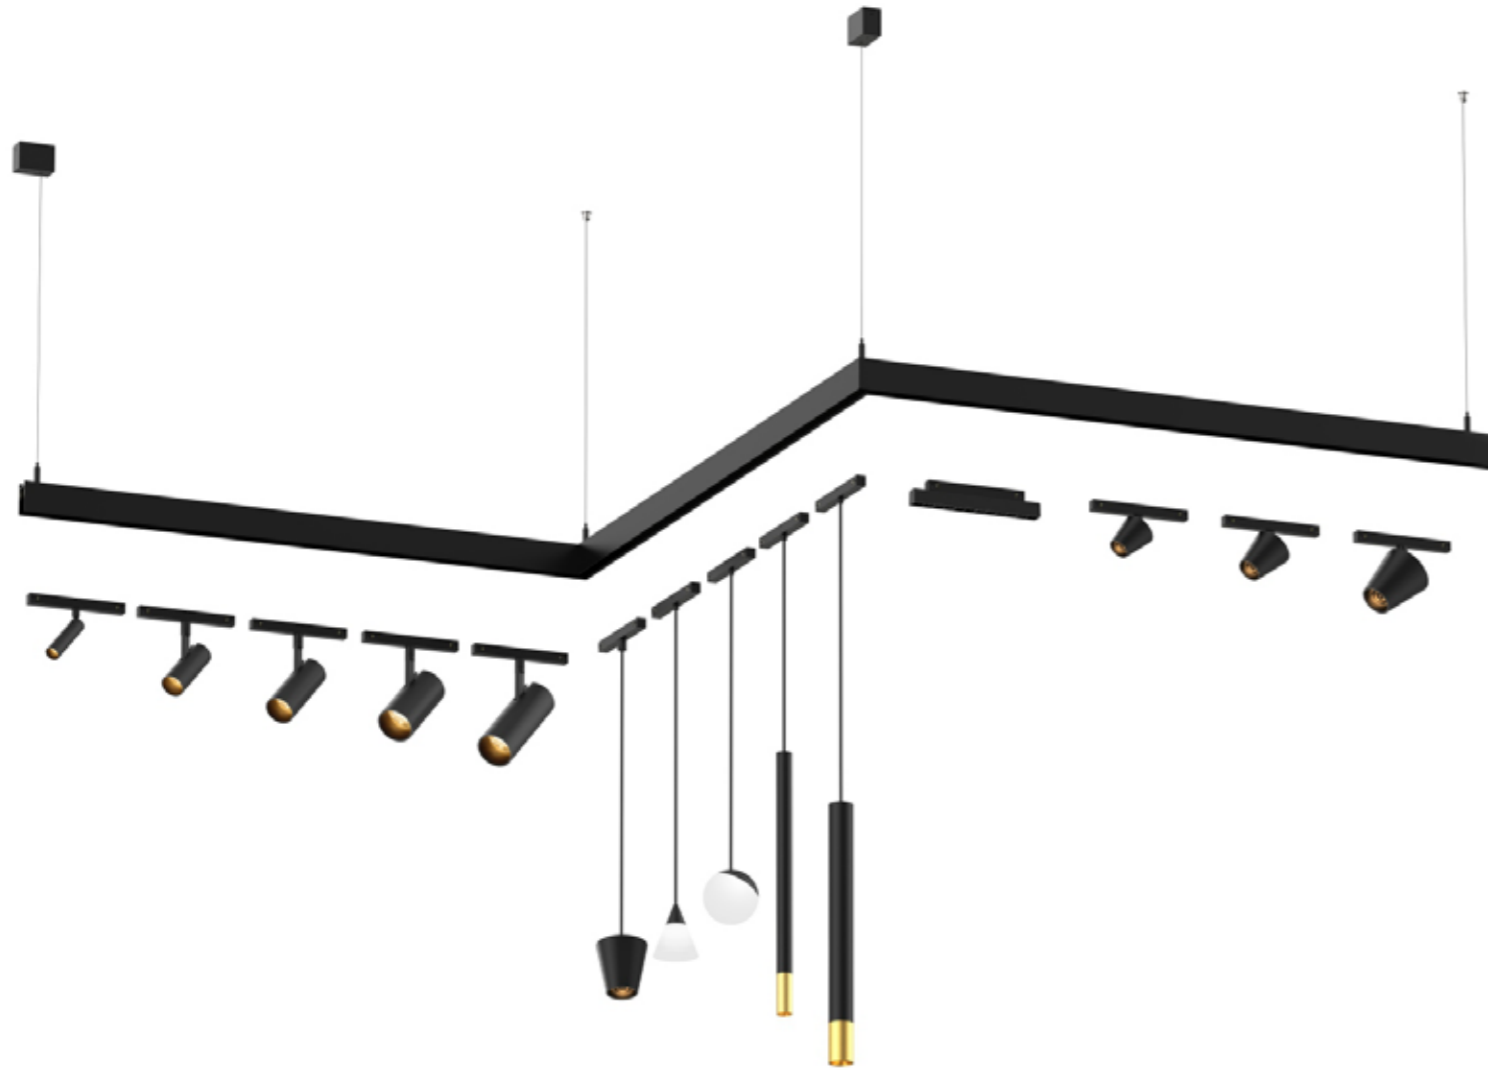


Magnetic track rail with a thin and slim design. Installation options: recessed, surface mounted (for both wall and ceiling) or suspended. Available in 1, 2 or 3m; in white structure or black structure.



DEEP RAIL

SURFACE

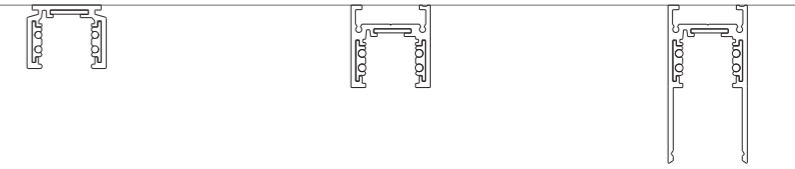


9500-.../...-ST1

9500-.../...-ST6

9500-.../...-ST2

SUSPENSION

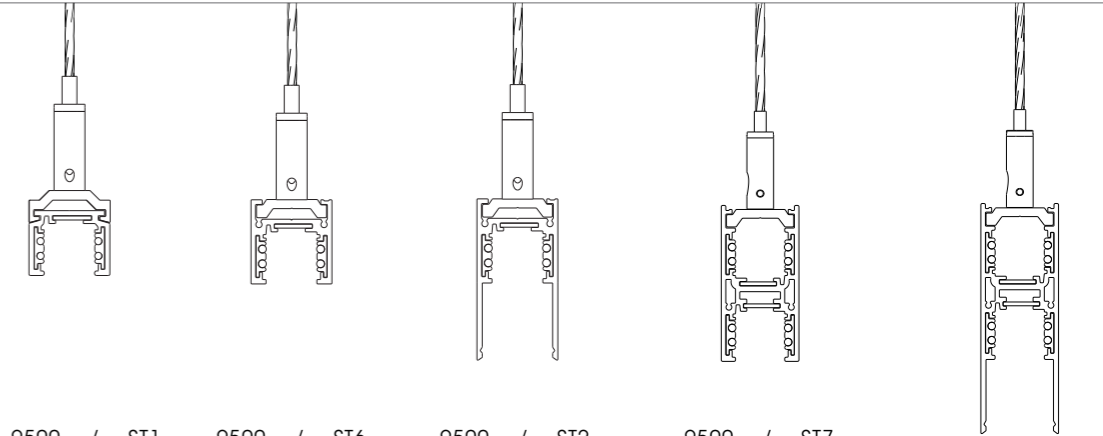

9500-.../...-ST1


9500-.../...-ST6

9500-.../...-ST2

9500-.../...-ST7


9500-.../...-ST9

RECESSED-TRIM



9500-.../...-ST8

RECESSED-TRIMLESS

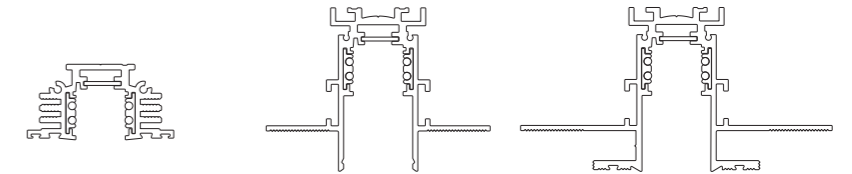













9500-.../...-ST3



9500-.../...-ST5

9500-.../...-ST10




COMPATIBILITY

	SLIM RAIL - TYPE 1			DEEP RAIL - TYPE 2		
						
	Surface Suspension	SURFACE SUSPENSION	RECESSED TRIMLESS	SURFACE SUSPENSION	RECESSED TRIMLESS	RECESSED TRIMLESS
	✓	✓	✓			
	✓	✓	✓	✓	✓	✓
	✓	✓	✓			
	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓

 COMPATIBLE
  COMPATIBLE - INCREASED DISTANCE BETWEEN TRACK & LUMINAIRE



magnetic snap mounting

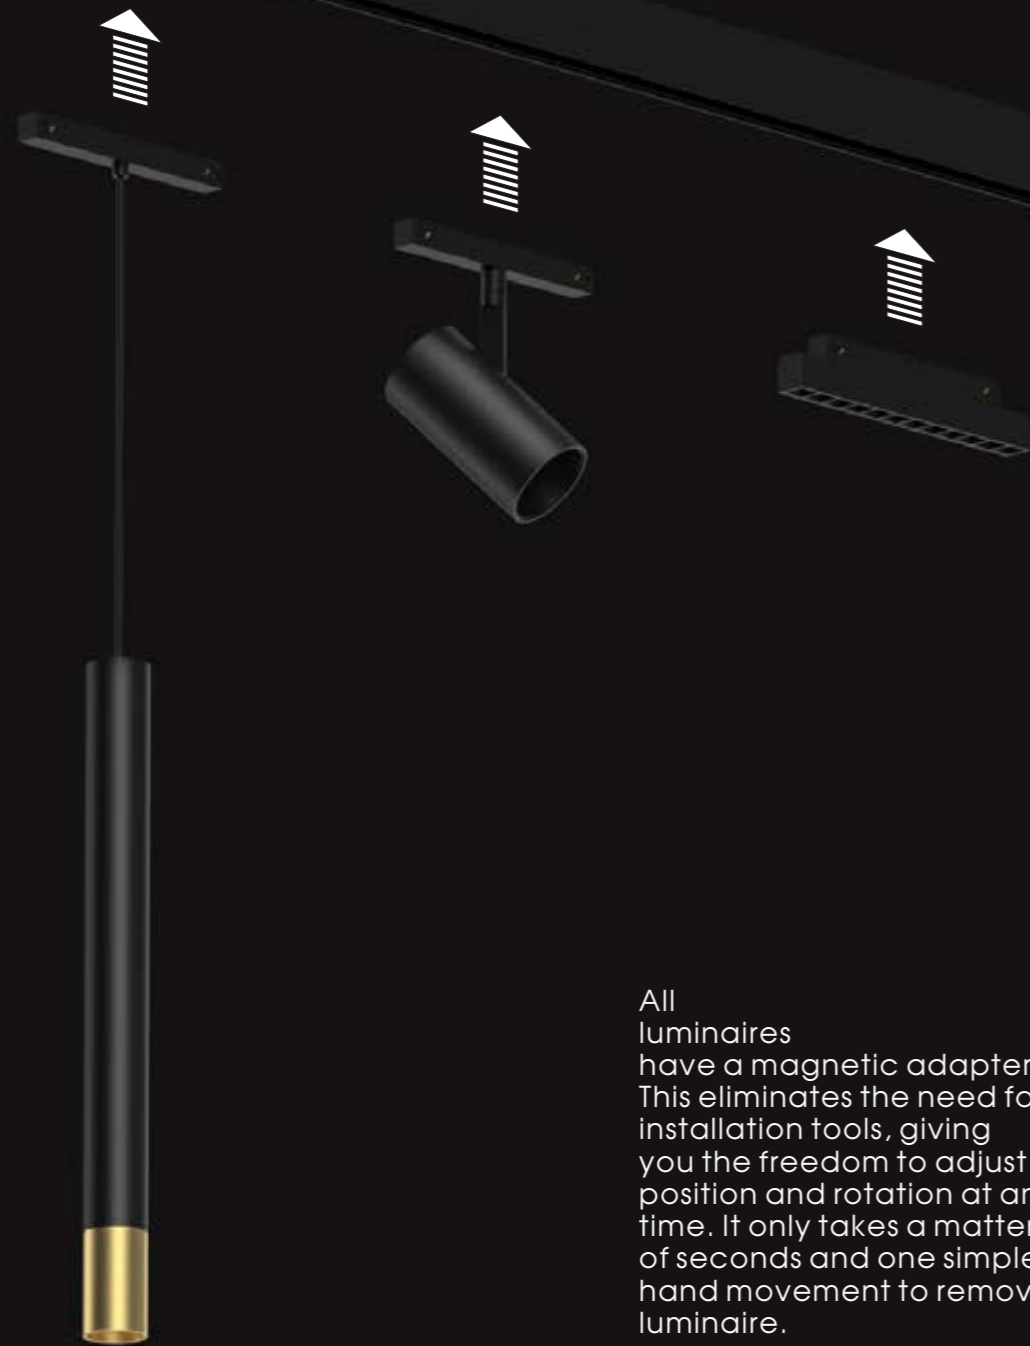

All luminaires have a magnetic adapter. This eliminates the need for installation tools, giving you the freedom to adjust the position and rotation at any time. It only takes a matter of seconds and one simple hand movement to remove a luminaire.

MAGNETIC TRACK SLIM




light colors

Choose from a wide range of color temperatures, CRI values and dimming protocols.



wireless controls

Seamless and instant control and dimming with the remote app for iOS and Android.

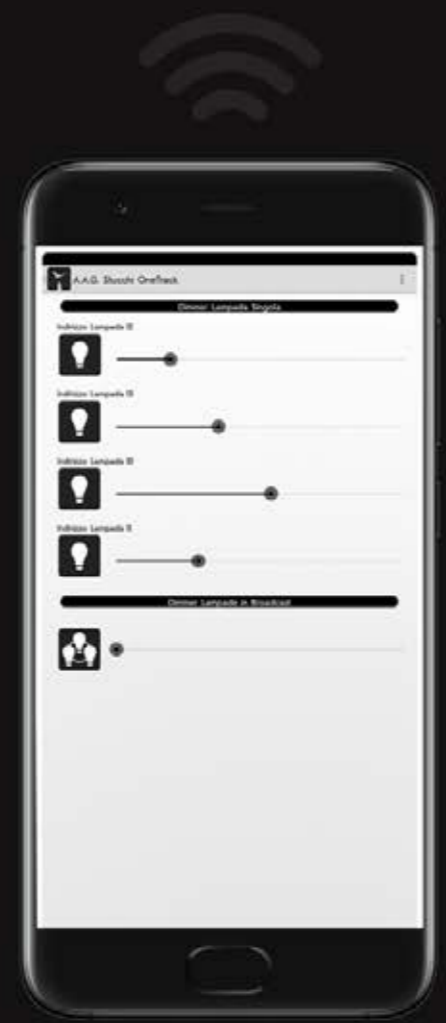

DALI Compatible:
The low voltage track system with integrated databus allows individual spotlights to be controlled with various driver options including Fixed Output and DALI. This will allow user-friendly light management for multi application.



90° horizontal
standard joint

90° vertical joint
on request

angular vertical joint
on request

angular vertical joint
on request

creative
configurations



Luminaires

TRACK LIGHT
PENDANT LIGHT
LINEAR LIGHT




Color : White Black


Product profile

Item Code	Input	Luminous Flux	Lamp	Beam Angle	Available Dimming
DC.TS0108-1	DC500mA 1x8W	250lm	CREE XHP35	15°/25°/30°	Dali
DC.TS0110-C	DC250mA 1x10W	794lm	HonourTEK	15°/24°/38°	Dali
DC.TS0115-C	DC350mA 1x15W	844lm	HonourTEK	15°/24°/38°	Dali
DC.TS0120-C	DC500mA 1x20W	456lm	CLM-9	15°/24°/38°	Dali
DC.TS0130-C	DC700mA 1x30W	1700lm	CXM-9	15°/24°/38°	Dali

Size

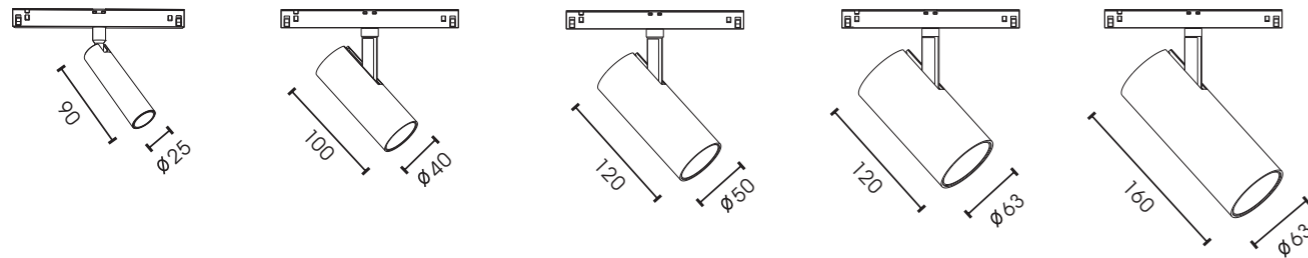



DC.TS0108-1 DC.TS0110-C DC.TS0115-C DC.TS0120-C DC.TS0130-C



DC.TS0108-1

0.22 IP20


Material	Input	Luminous Flux	Lamp	CRI	Beam Angle
Aluminum	DC500mA 1x8W	375lm/3000K	CREE XHP35	Ra≥90	15°/25°/30°

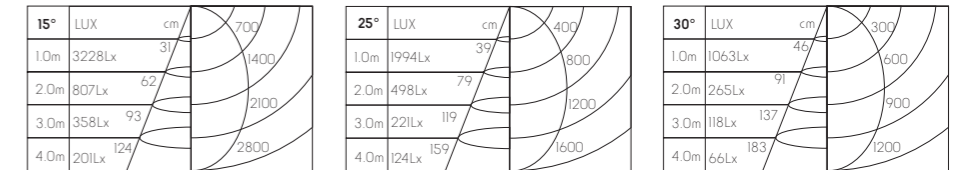

DC.TS0110-C

0.28 IP20


Material	Input	Luminous Flux	Lamp	CRI	Beam Angle
Aluminum	DC250mA 1x10W	551lm/3000K	Honourtek HRA0607	Ra≥95	15°/24°/38°

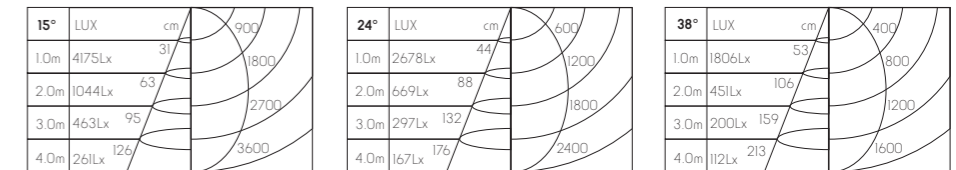

Optional Accessories



Optional Colors for Baffle








DC.TS0115-C

0.41 IP20

Material	Input	Luminous Flux	Lamp	CRI	Beam Angle
Aluminum	DC350mA 1x15W	844lm/3000K	Honourtek HRA0610	Ra≥95	15°/24°/38°



Beam Angle	LUX	cm	Beam Angle
15°	9217Lx	27	3800
2.0m	2304Lx	55	5700
3.0m	1024Lx	82	7600
4.0m	576Lx	110	7600

Beam Angle	LUX	cm	Beam Angle
24°	5657Lx	39	2400
2.0m	1414Lx	78	3600
3.0m	628Lx	118	4800
4.0m	353Lx	157	4800


Beam Angle	LUX	cm	Beam Angle
36°	2993Lx	54	1200
2.0m	748Lx	109	1800
3.0m	332Lx	163	2400
4.0m	187Lx	218	2400



DC.TS0120-C

0.61 IP20

Material	Input	Luminous Flux	Lamp	CRI	Beam Angle
Aluminum	DC500mA 1x20W	1271lm/3000K	CLM-9	Ra≥90	15°/24°/38°




Beam Angle	LUX	cm	Beam Angle
15°	12096Lx	30	3000
2.0m	3024Lx	61	6000
3.0m	1344Lx	91	9000
4.0m	756Lx	122	12000


Beam Angle	LUX	cm	Beam Angle
24°	8625Lx	42	1600
2.0m	2156Lx	85	3200
3.0m	958Lx	128	4800
4.0m	539Lx	171	6400

Beam Angle	LUX	cm	Beam Angle
38°	5173Lx	57	1100
2.0m	1293Lx	115	2200
3.0m	574Lx	172	3300
4.0m	323Lx	230	4400

Optional Accessories

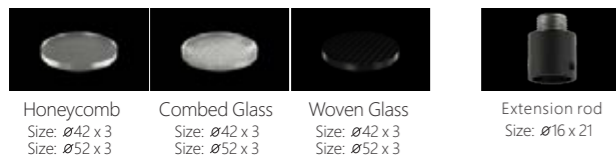


Optional Colors for Baffle



DC.TS0130-C

0.56 IP20

Material	Input	Luminous Flux	Lamp	CRI	Beam Angle
Aluminum	DC700mA 1x30W	1700lm/3000K	CLM-9	Ra≥90	15°/24°/38°

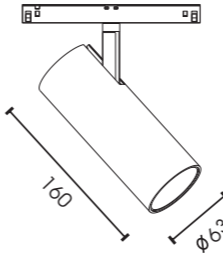


Beam Angle	LUX	cm	Beam Angle
15°	17360Lx	28	4000
2.0m	4340Lx	56	8000
3.0m	1929Lx	84	12000
4.0m	1085Lx	113	16000


Beam Angle	LUX	cm	Beam Angle
24°	12298Lx	42	3000
2.0m	3075Lx	84	6000
3.0m	1366Lx	126	9000
4.0m	768Lx	168	12000

Beam Angle	LUX	cm	Beam Angle
38°	7588Lx	57	1500
2.0m	1897Lx	114	3000
3.0m	843Lx	171	4500
4.0m	474Lx	228	6000

Optional Accessories

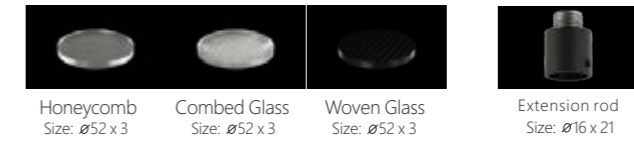

Optional Colors for Baffle



Optional Accessories



Extension Rod: By adding extension rod to the arm, it can fit to track TYPE 2








Color : White Black


Product profile

Item Code	Input	Luminous Flux	Lamp	Beam Angle	Available Dimming
DC.TS0206-C	DC150mA 1x6W	414lm	HonourTEK	15°/24°/38°	Dali
DC.TS0210-C	DC250mA 1x10W	660lm	HonourTEK	15°/24°/38°	Dali
DC.TS0215-C	DC350mA 1x15W	844lm	HonourTEK	15°/24°/38°	Dali


Size



DC.TS0206-C



DC.TS0210-C




DC.TS0215-C



DC.TS0206-C

0.25 IP20

Material	Input	Luminous Flux	Lamp	CRI	Beam Angle
Aluminum	DC150mA 1x6W	414lm/3000K	Honourtek HRA0604	Ra ≥ 95	15°/24°/38°



15°	LUX	cm	600
1.0m	960Lx	64	1200
2.0m	240Lx	128	1800
3.0m	106Lx	194	2400
4.0m	60Lx	259	

24°	LUX	cm	400
1.0m	783Lx	76	800
2.0m	195Lx	152	1200
3.0m	87Lx	228	1600
4.0m	48Lx	304	


38°	LUX	cm	300
1.0m	543Lx	96	600
2.0m	135Lx	193	900
3.0m	60Lx	289	1200
4.0m	33Lx	386	



DC.TS0210-C

0.33 IP20

Material	Input	Luminous Flux	Lamp	CRI	Beam Angle
Aluminum	DC250mA 1x10W	660lm/3000K	Honourtek HRA0607	Ra ≥ 95	15°/24°/38°



15°	LUX	cm	800
1.0m	388Lx	32	1600
2.0m	97Lx	64	2400
3.0m	43Lx	96	3200
4.0m	24Lx	128	

24°	LUX	cm	600
1.0m	2610Lx	41	1200
2.0m	652Lx	83	1800
3.0m	290Lx	125	2400
4.0m	163Lx	167	

38°	LUX	cm	400
1.0m	1749Lx	56	800
2.0m	437Lx	113	1200
3.0m	194Lx	170	1600
4.0m	109Lx	227	

Optional Accessories



Honeycomb Size: Ø26 x 3 Size: Ø33 x 3
Combed Glass Size: Ø26 x 3 Size: Ø33 x 3
Woven Glass Size: Ø26 x 3 Size: Ø33 x 3



Extension rod Size: Ø16 x 21

Optional Colors for Baffle



White Golden Black






DC.TS0215-C

0.58 IP20

Material	Input	Luminous Flux	Lamp	CRI	Beam Angle
Aluminum	DC350mA 1x15W	844lm/3000K	Honourtek HRA0610	Ra ≥ 95	15°/24°/38°

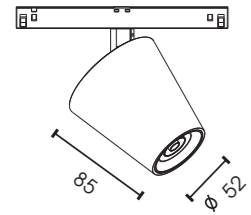

Beam Angle	LUX	cm	105%
15°	5267Lx	31	2112
2.0m	1316Lx	63	3168
3.0m	842Lx	95	4224
4.0m	329Lx	127	

Beam Angle	LUX	cm	65%
24°	3257Lx	45	1307
2.0m	814Lx	91	1960
3.0m	316Lx	137	2614
4.0m	203Lx	183	




Beam Angle	LUX	cm	45%
38°	2251Lx	57	902
2.0m	562Lx	114	1353
3.0m	250Lx	172	1804
4.0m	140Lx	229	



Optional Accessories



Optional Colors for Baffle

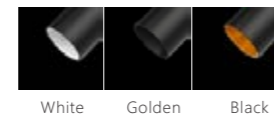

Adjustable scale 30 60 90





UGR < 4




Color : White Black


Product profile

Item Code	Input	Luminous Flux	Lamp	Beam Angle	Available Dimming
DC.TB0315-1	DC350mA 15W	900lm	OSRAM 3030	24°/36°	Dali
DC.TB0418-2	DC700mA 18W	1200lm	OSRAM 3030	24°/36°	


Size

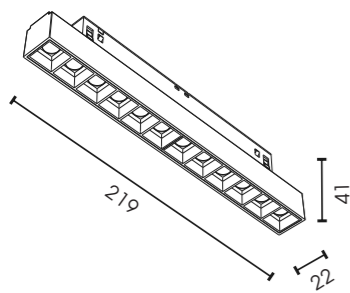

DC.TB0315-1

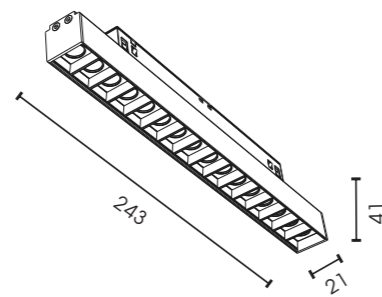



DC.TB0418-2

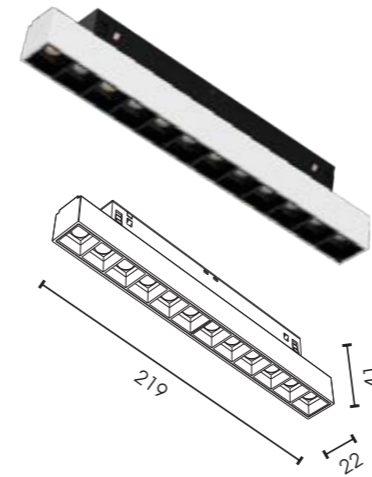

DC.TB0315-1

0.25 IP20

Material	Input	Luminous Flux	Lamp	CRI	Beam Angle
Aluminum	DC350mA 15W	900lm/3000K	OSRAM 3030	Ra≥90	24°/36°

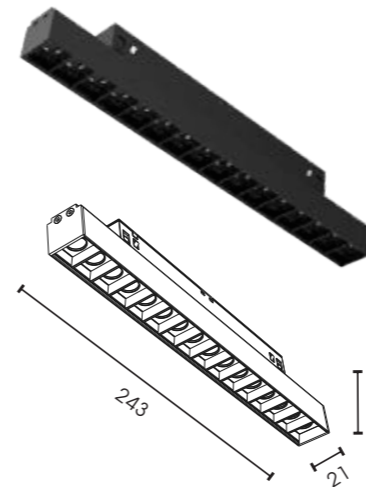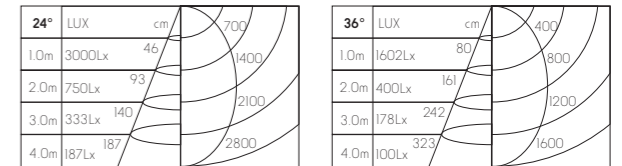

DC.TB0418-1

0.25 IP20

Material	Input	Luminous Flux	Lamp	CRI	Beam Angle
Aluminum	DC350mA 15W	1200lm/3000K	OSRAM 3030	Ra≥90	24°/36°





Color : White Black

Product profile

Item Code	Input	Luminous Flux	Lamp	Beam Angle	Available Dimming
DC.TF0403-1	DC150mA 4W	120lm	OSRAM 2835	120°	Dali
DC.TF0406-1	DC250mA 6.5W	210lm	OSRAM 2835	120°	Dali
DC.TF0409-1	DC350mA 9W	410lm	OSRAM 2835	120°	Dali
DC.TF0412-1	DC500mA 12W	650lm	OSRAM 2835	120°	Dali


Size

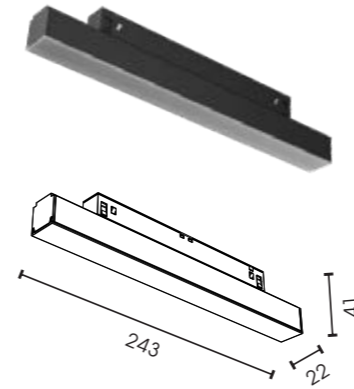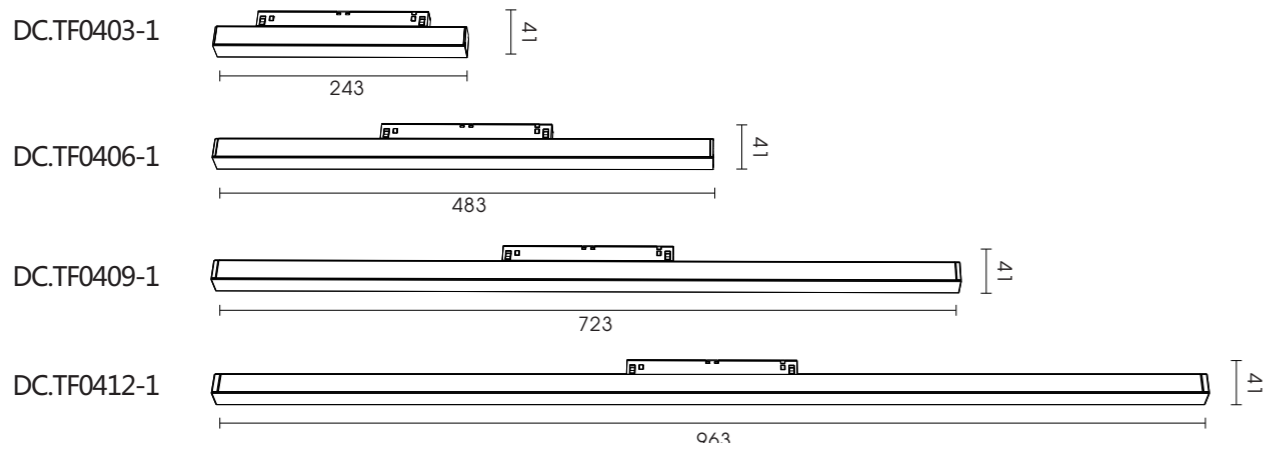

DC.TF0403-1

0.25 IP20

Material	Input	Luminous Flux	Lamp	CRI	Beam Angle
Aluminum	DC150mA 4W	120lm/3000K	OSRAM 2835	R _a ≥ 90	120°

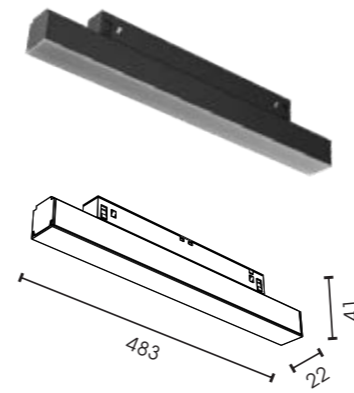

DC.TF0406-1

0.25 IP20

Material	Input	Luminous Flux	Lamp	CRI	Beam Angle
Aluminum	DC250mA 6.5W	210lm/3000K	OSRAM 2835	R _a ≥ 90	120°






DC.TF0409-1

0.25 IP20


Material	Input	Luminous Flux	Lamp	CRI	Beam Angle
Aluminum	DC350mA 9W	410lm/3000K	OSRAM 2835	Ra≥90	120°

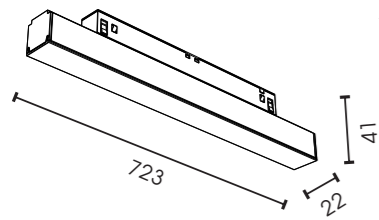


DC.TF0412-1

0.25 IP20


Material	Input	Luminous Flux	Lamp	CRI	Beam Angle
Aluminum	DC500mA 12W	650lm/3000K	OSRAM 2835	Ra≥90	120°

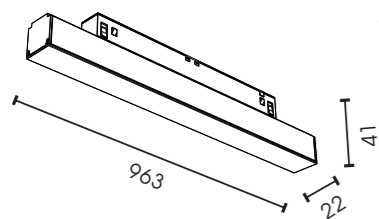

Extension Rod: By adding extension rod to the arm, it can fit to track TYPE 2



9500-.../...-ST7



9500-.../...-ST9








Color : White Black


Product profile

Item Code	Input	Luminous Flux	Lamp	Beam Angle	Available Dimming
DC.PS0108-1	DC500mA 1x8W	229lm	CREE XHP35	15°/25°/30°	Dali
DC.PS0110-1	DC250mA 1x10W	767lm	HonourTEK	20°/38°	Dali


Size

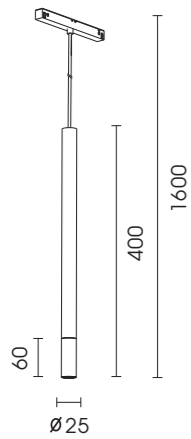

DC.PS0108-1

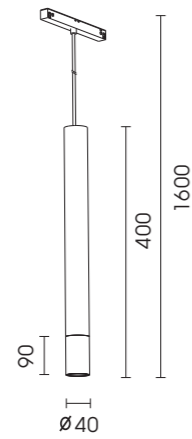

DC.PS0110-1

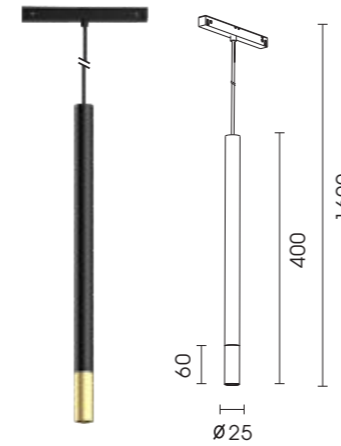

DC.PS0108-1


0.34 CE IP20

Material	Input	Luminous Flux	Lamp	CRI	Beam Angle
Aluminum	DC500mA 1x8W	229lm/3000K	CREE XHP35	Ra ≥ 90	15°/25°/30°

15°	LUX	cm
1.0m	3228Lx	31
2.0m	807Lx	62
3.0m	358Lx	93
4.0m	201Lx	124

25°	LUX	cm
1.0m	1994Lx	39
2.0m	498Lx	79
3.0m	221Lx	119
4.0m	124Lx	159

30°	LUX	cm
1.0m	1063Lx	45
2.0m	265Lx	91
3.0m	118Lx	137
4.0m	66Lx	183

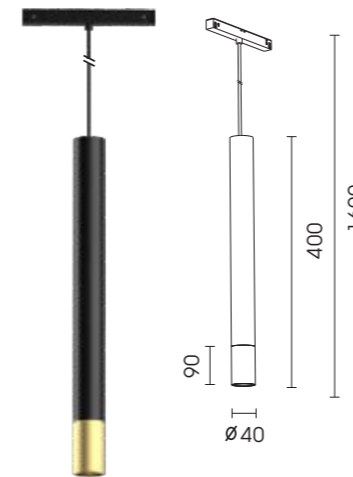

DC.PS0110-1

0.52 CE IP20

Material	Input	Luminous Flux	Lamp	CRI	Beam Angle
Aluminum	DC250mA 1x10W	767lm/3000K	Honourtek HRA0607	Ra ≥ 95	20°/38°

20°	LUX	cm
1.0m	2823Lx	36
2.0m	705Lx	72
3.0m	313Lx	108
4.0m	176Lx	144

38°	LUX	cm
1.0m	1476Lx	63
2.0m	368Lx	126
3.0m	164Lx	189
4.0m	92Lx	252

Optional Accessories



Honeycomb Size: Ø19 x 3 Size: Ø33 x 3
Combed Glass Size: Ø19 x 3 Size: Ø33 x 3
Woven Glass Size: Ø19 x 3 Size: Ø33 x 3

Optional Colors for Baffle



White Golden Black






Color : White Black


Product profile

Item Code	Input	Luminous Flux	Lamp	Beam Angle	Available Dimming
DC.PS0206-C	DC150mA 1x6W	414lm	HonourTEK	15°/24°/38°	Dali
DC.PS0210-C	DC250mA 1x10W	660lm	HonourTEK	15°/24°/38°	Dali
DC.PS0215-C	DC350mA 1x15W	844lm	HonourTEK	15°/24°/38°	Dali


Size

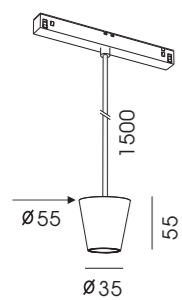


DC.TS0206-C

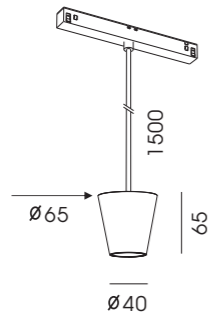

DC.TS0210-C

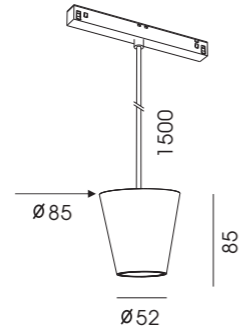




DC.TS0215-C

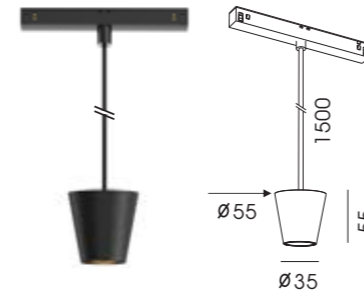

DC.PS0206-C

0.23 F CE IP20




Material	Input	Luminous Flux	Lamp	CRI	Beam Angle
Aluminum	DC150mA 1x6W	414lm/3000K	Honourtek HRA0604	Ra≥95	15°/24°/38°

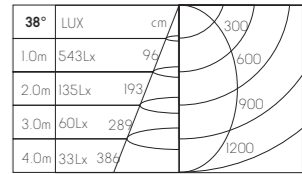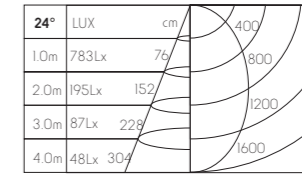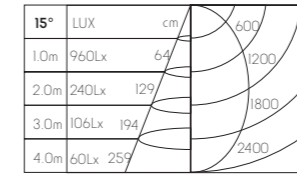

DC.PS0210-C

0.33 F CE IP20




Material	Input	Luminous Flux	Lamp	CRI	Beam Angle
Aluminum	DC250mA 1x10W	660lm/3000K	Honourtek HRA0607	Ra≥95	15°/24°/38°

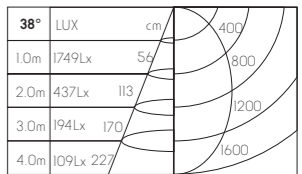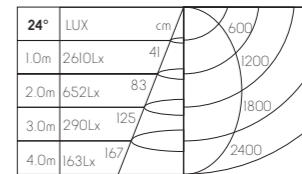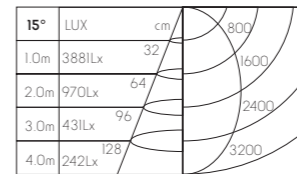


DC.PS0215-C

0.58 F CE IP20

Material	Input	Luminous Flux	Lamp	CRI	Beam Angle
Aluminum	DC350mA 1x15W	844lm/3000K	Honourtek HRA0610	Ra≥95	15°/24°/38°

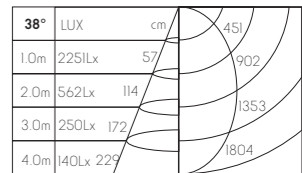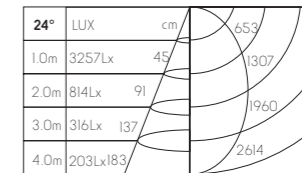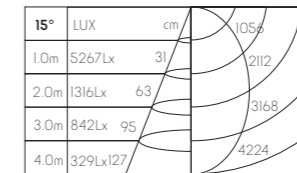


Optional Accessories

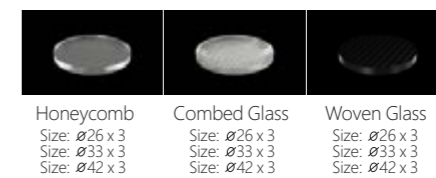

Honeycomb Size: Ø26 x 3
Size: Ø33 x 3
Size: Ø42 x 3
Combed Glass Size: Ø26 x 3
Size: Ø33 x 3
Size: Ø42 x 3
Woven Glass Size: Ø26 x 3
Size: Ø33 x 3
Size: Ø42 x 3

Optional Colors for Baffle



White Golden Black






Color : White Black


Product profile

Item Code	Input	Luminous Flux	Lamp	Beam Angle	Available Dimming
DC.PF0104-1	DC150mA 1x4W	160lm	OSRAM 3030	120°	Dali
DC.PF0204-1	DC150mA 1x4W	240lm	OSRAM 3030	120°	Dali


Size

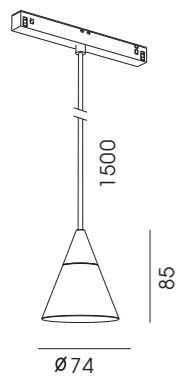

DC.PF0104-1

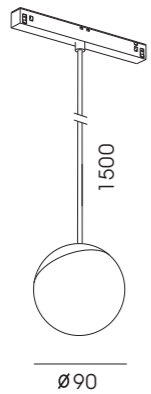


DC.PF0204-1

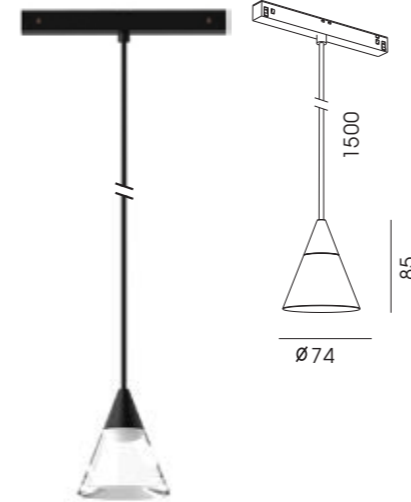

DC.PF0104-1

0.35 IP20

Material	Input	Luminous Flux	Lamp	CRI	Beam Angle
Aluminum	DC150mA 1x4W	160lm/3000K	OSRAM3030	Ra≥90	120°

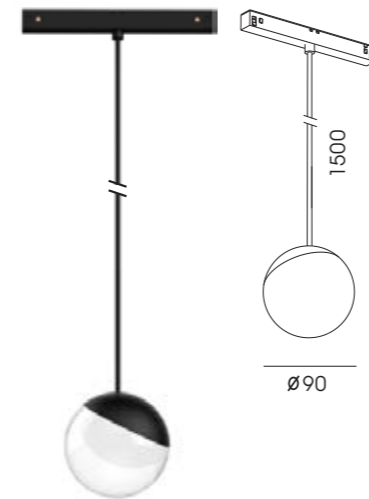

DC.PF0204-1

0.62 IP20

Material	Input	Luminous Flux	Lamp	CRI	Beam Angle
Aluminum	DC150mA 1x6W	240lm/3000K	OSRAM3030	Ra≥90	120°






Tracks


TRACKS
ACCESSORIES
DIMENSIONS
DIAGRAM

LOW VOLTAGE TRACK


section drawings




9500-.../...-ST1

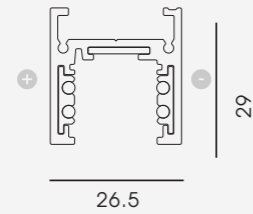

9500-.../...-ST6

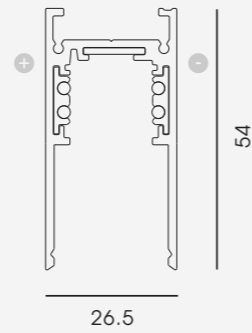


9500-.../...-ST2

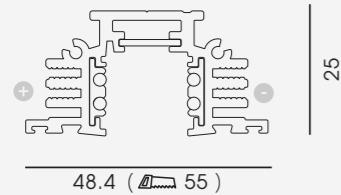


INSTALLATION HEIGHT: 105 mm

9500-.../...-ST3

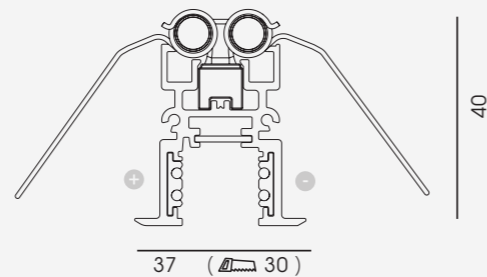


INSTALLATION HEIGHT: 105 mm

9500-.../...-ST8

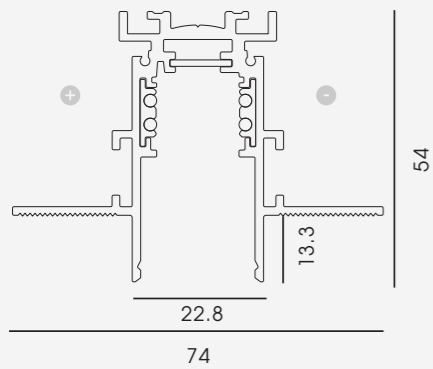

INSTALL RAIL BEFORE ADDING CEILING

9500-.../...-ST5

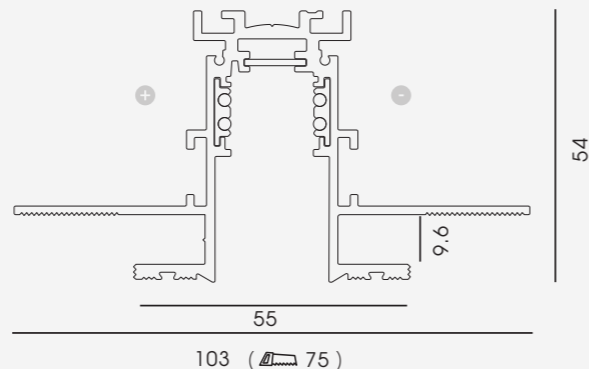

INSTALLATION HEIGHT: 125 mm

9500-.../...-ST10

PRODUCT CODES



FINISHING

EMBOSSSED

BLACK ANODIZED - WHITE PAINTED

ST1 ST2 ST6

ST3 ST5 ST8 ST10



STANDARD



Available colours: **W** White RAL 9010 **W2** White RAL 9016
B Black RAL 9005 **RA** Raw aluminium

END CAP




9504/ST1-...
9504/ST1-...-F

Metal sheet end cap; ...-F: with hole for cable

W **B** Embossed

ST1



9504/ST1-P-...
9504/ST1-P-...-F

Plastic end cap; ...-F: with hole for cable

W **B** Embossed effect

ST1

BRACKETS



S-9500/312-LA-...

Short bracket for suspensions

W **B** **RA** Embossed

ST1



S-9500/322-LA-...

Long bracket for suspensions

W **W2** **B** **RA** Embossed

ST1



S-9500/312-SV-...

Short bracket for suspensions

W **W2** **B** **RA** Embossed

ST1



S-9500/322-SV-...

Long bracket for suspensions

W **B** Embossed

ST1

CUPS




S-9000/3-...

Plastic cup for steel cable Ø 1.5mm

W **B**

ST1



S-9000/216

Chrome plated brass round head ceiling

ST...


CEILING FIXING BRACKET




S-9000/132

Ceiling bracket for suspensions


ST1

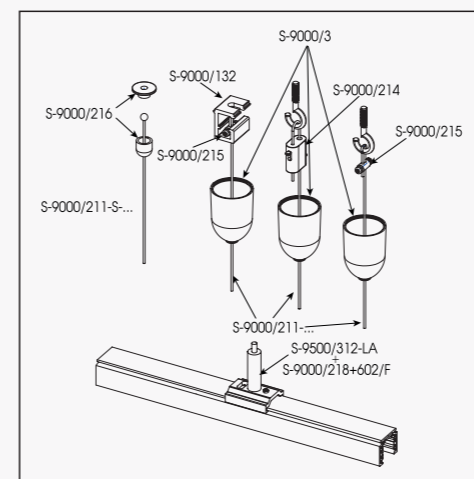

Suspension accessories with track adjustment

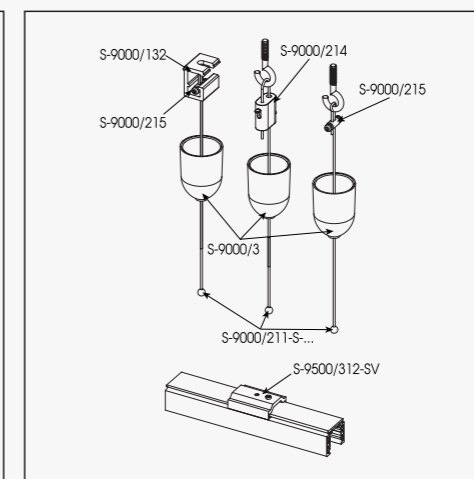


Suspension accessories with ceiling adjustment

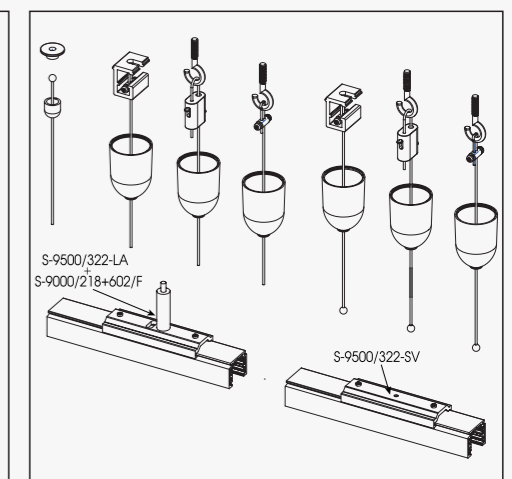

Accessories for „in row“ use junctions




H

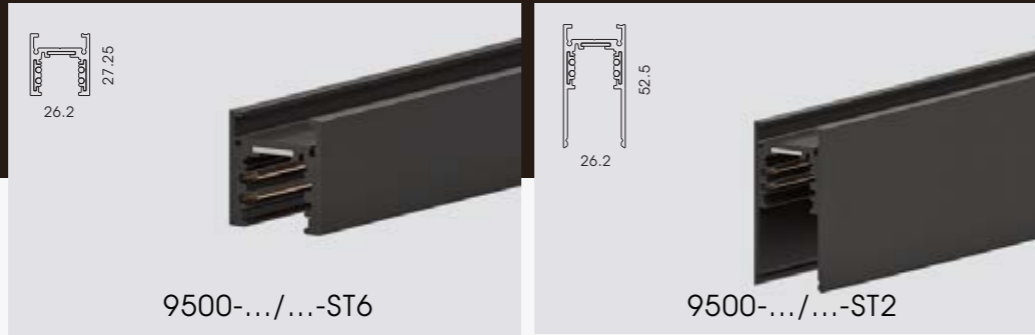

Available colours: **W** White RAL 9010 **W2** White RAL 9016
B Black RAL 9005 **RA** Raw aluminium

END CAP




9504/ST2-...
9504/ST2-...-F

Metal sheet end cap; ...-F: with hole for cable

W **W2** **B** Embossed

ST2



S-9500-L/W-...
S-9500-L/W2-...
S-9500-L/B-...

Plastic cover strip (length: 1, 2, 3m)

W **W2** **B** Embossed effect

ST2



9504/ST6-...
9504/ST6-...-F

Metal sheet end cap; ...-F: with hole for cable

W **B** Embossed

ST6

BRACKETS



S-9500/313-LA-...

Short bracket for suspensions

ST2

ST6




S-9500/323-LA-...

Long bracket for suspensions

ST2

ST6




S-9500/313-M6-...

Short bracket for suspensions

ST2

ST6

RA Embossed



S-9500/323-M6-...

Long bracket for suspensions

ST2

ST6



S-9500/313-M13-...

Short bracket for suspensions

ST2

ST6



S-9500/323-M13-...

Long bracket for suspensions

ST2

ST6



S-9500/313-SV-...

Short bracket for suspensions

ST2

ST6



S-9500/323-SV-...

Long bracket for suspensions

ST2

ST6

CEILING FIXING BRACKET



S-9000/132

Ceiling bracket for suspensions

ST2

ST6

H

Available colours: **W** White RAL 9010 **W2** White RAL 9016
B Black RAL 9005 **Raw** Raw aluminium

CUPS




S-9000/3-...

Plastic cup for steel cable Ø 1.5mm

W **B**

ST2

ST6



S-9000/216

Chrome plated brass round head ceiling

ST2

ST6

CEILING FIXING HOOK



S-9000/232

Galvanized hook with fixing hole (Ø13mm) for stem

ST2

ST6

STEM



S-9000-1,2/604-...


Painted metal stem with M13X1 end + nut (L=1,2m)

W **W2** **B**

ST2

ST6

CONNECTIONS ACCESSORIES



S-9511/ST2

Cover for L joint

W **B**

ST2




S-9511/ST6

Cover for L joint

W **B**

ST6

COMPLETE SUSPENSION KITS

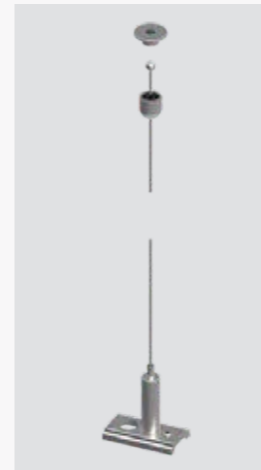

9500-KIT1-1,5
9500-KIT1-3
9500-KIT1-5

Includes:

- round head ceiling attachment
- steel cable Ø 1,5mm (L=1500/3000/5000mm) with spherical end
- bracket with automatic gripper

ST2

ST6



9500-KIT2-1,5
9500-KIT2-3
9500-KIT2-5


Includes:

- round head ceiling attachment
- steel cable Ø 1,5mm (L=1500/3000/5000mm) with spherical end
- bracket with automatic gripper

ST2

ST6

SUSPENSION SETS

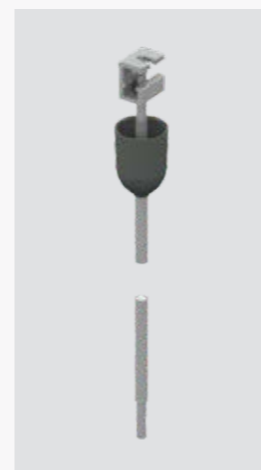

S-9000-P3

Includes:

- ceiling bracket
- M6 nut
- plastic cup
- M6 threaded bar (L=1000mm)

W

W2

B

Raw

ST2

ST6



S-9000-P4

Includes:


- ceiling bracket
- M6 nut
- M6 threaded bar (L=1000mm)

ST2

ST6



Available colours: **W** White RAL 9010 **W2** White RAL 9016
B Black RAL 9005 **Raw aluminium**

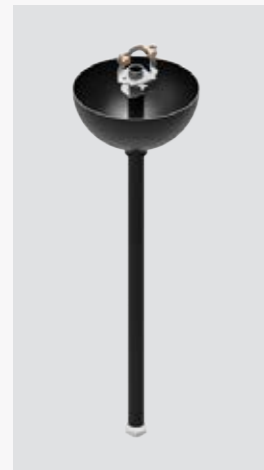


S-9000-P5-B

- Includes:
- ceiling hook
 - metal stem (L=1200mm)
 - metal cup

W W2 B

ST2 ST6

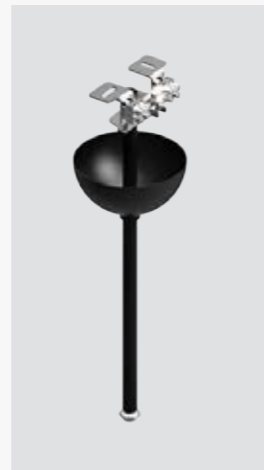


S-9000-P6-P-...

- Includes:
- ceiling bracket
 - metallic cup (∅ 100mm)
 - M13 threaded stem (L=1200mm) with counter-nut
 - 2 2P terminal blocks 400V-32A; T: 125°C; sect. 4mm² + dedicated earth terminal block

W W2 B

ST2 ST6

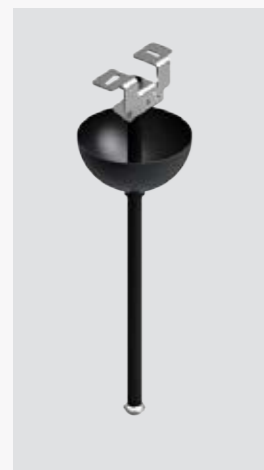


S-9000-P6-S-...

- Includes:
- ceiling bracket
 - metallic cup (∅ 100mm)
 - M13 threaded stem (L=1200mm) with counter-nut

W W2 B

ST2 ST6

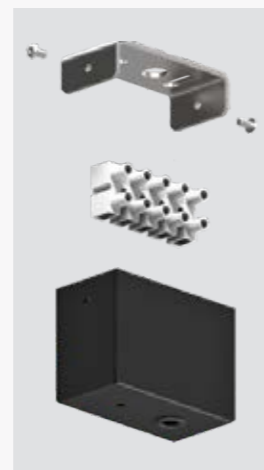


S-RE-P-...

- Includes:
- ceiling bracket
 - 1 5P terminal block 400V-32A; T: 125°C; sect. 4mm²
 - metallic cup


W W2 B EMBOSSED

ST2 ST6


ST2, ST6 TRACKS

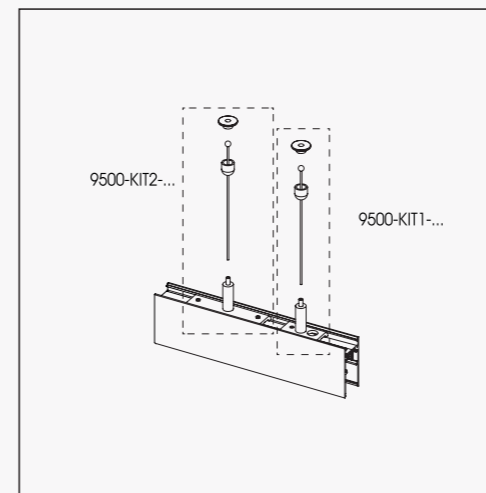


Complete suspension kit

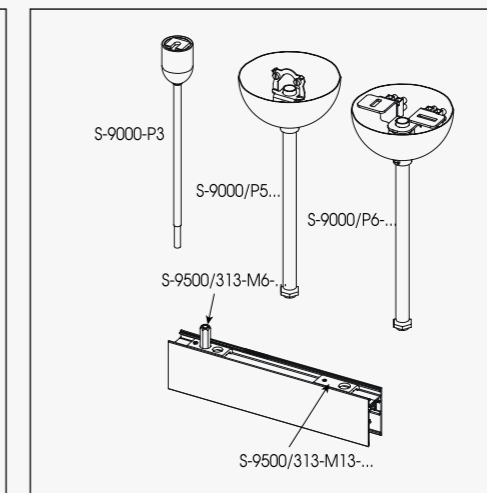


Suspension sets

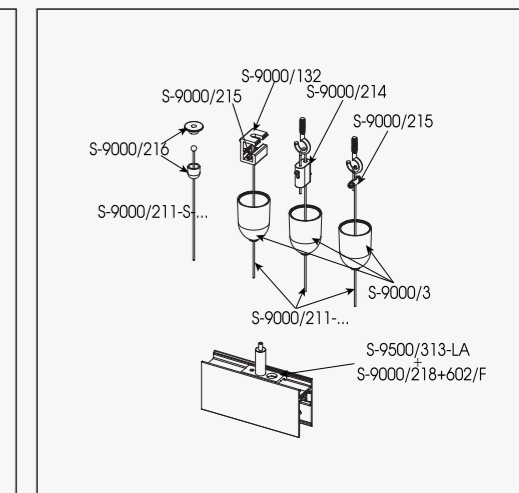

Suspension accessories with track adjustment

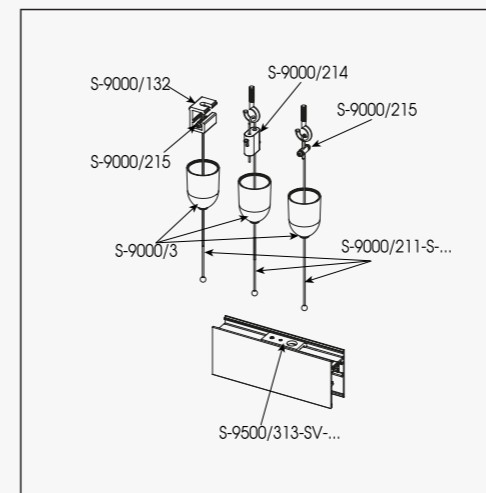

Suspension accessories with ceiling adjustment

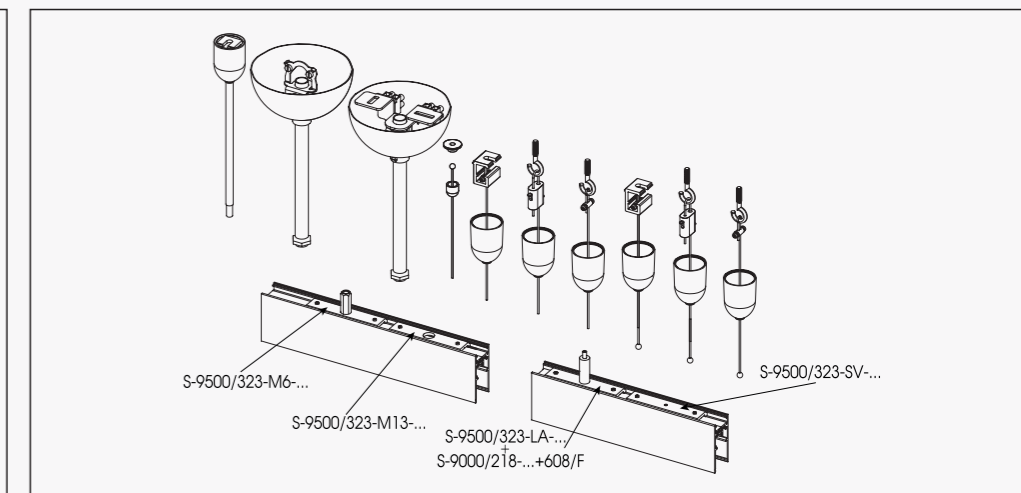

Accessories for „in row“ use junctions



TRIMLESS
recessed



Available colours: **W** White RAL 9010 **W2** White RAL 9016
B Black RAL 9005 **Raw aluminium**

END CAP



9504/ST3-B


Metal sheet end cap

ST3

W2 **B**

Embossed

BRACKETS




S-9500/314-...

Reinforcing bracket for jointing connector

ST3


W2 **B**



S-9500/315

Bracket for trimless use

ST3

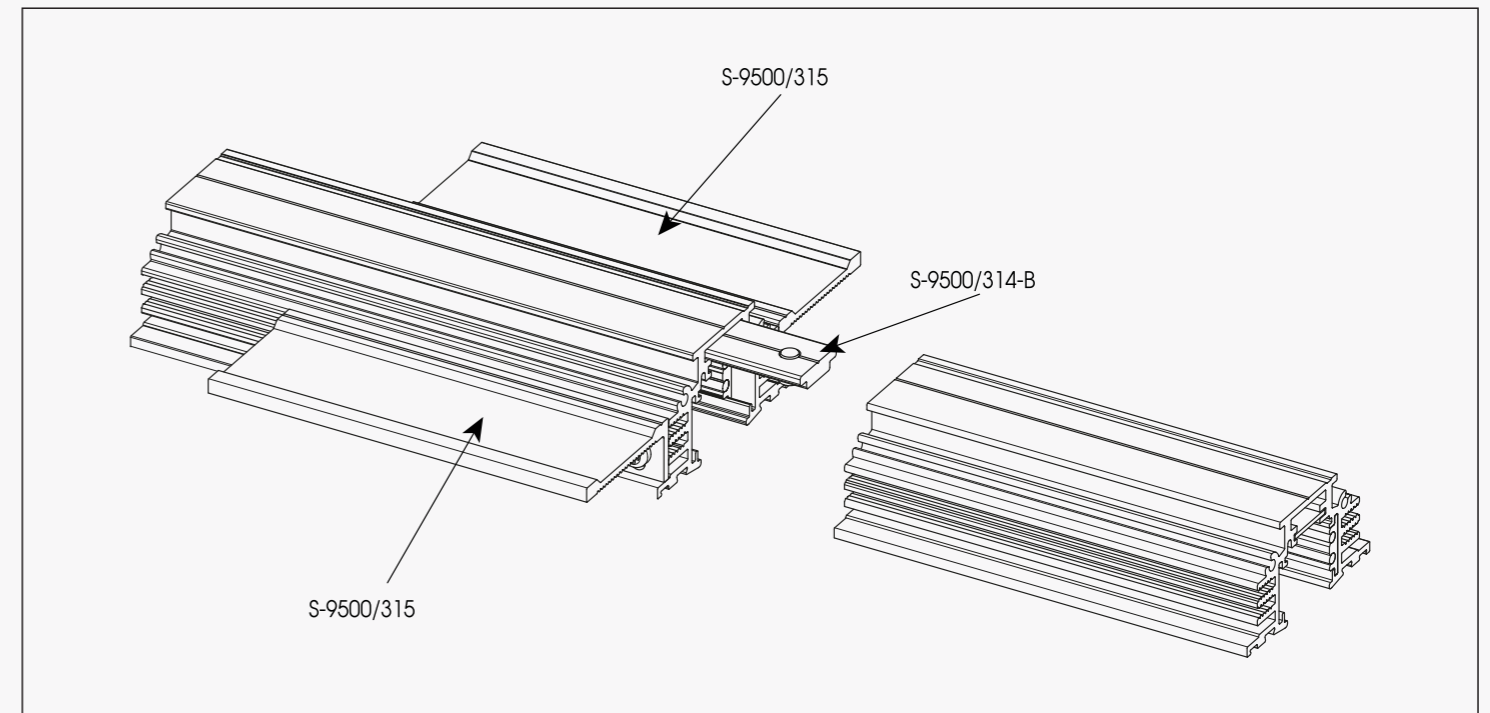

Accessories for trimless track

TRIM
recessed



Available colours: **W** White RAL 9010 **W2** White RAL 9016
B Black RAL 9005 **Raw aluminium**

END CAP



9504/ST8-...

Metal sheet end cap

W2

B

Embossed

ST8

BRACKETS



S-9500/313-LA-...

Short bracket for suspensions



ST8



S-9500/323-LA-...

Long bracket for suspensions



ST8



S-9500/323-M6-...

Long bracket for suspensions



ST8



S-9500/313-M13-...

Short bracket for suspensions



ST8



S-9500/323-M13-...

Long bracket for suspensions



ST8



S-9500/313-SV-...

Short bracket for suspensions



ST8




S-9500/323-SV-...

Long bracket for suspensions



ST8



S-9500/316

Bracket with spring



ST8

CEILING FIXING BRACKET



S-9000/132

Ceiling bracket for suspensions

ST8

STEM



S-9000-1,2/604-...

Painted metal stem with M13X1 end + nut (L=1,2m)

W

W2

B

ST8



TRIM
recessed

Available colours: **W** White RAL 9010 **W2** White RAL 9016
B Black RAL 9005 **LA** Raw aluminium

SUSPENSION SETS




S-9000-P4

- Includes:
- ceiling bracket
 - M6 nut
 - M6 threaded bar (L=1000mm)



ST8


ST8 TRACKS

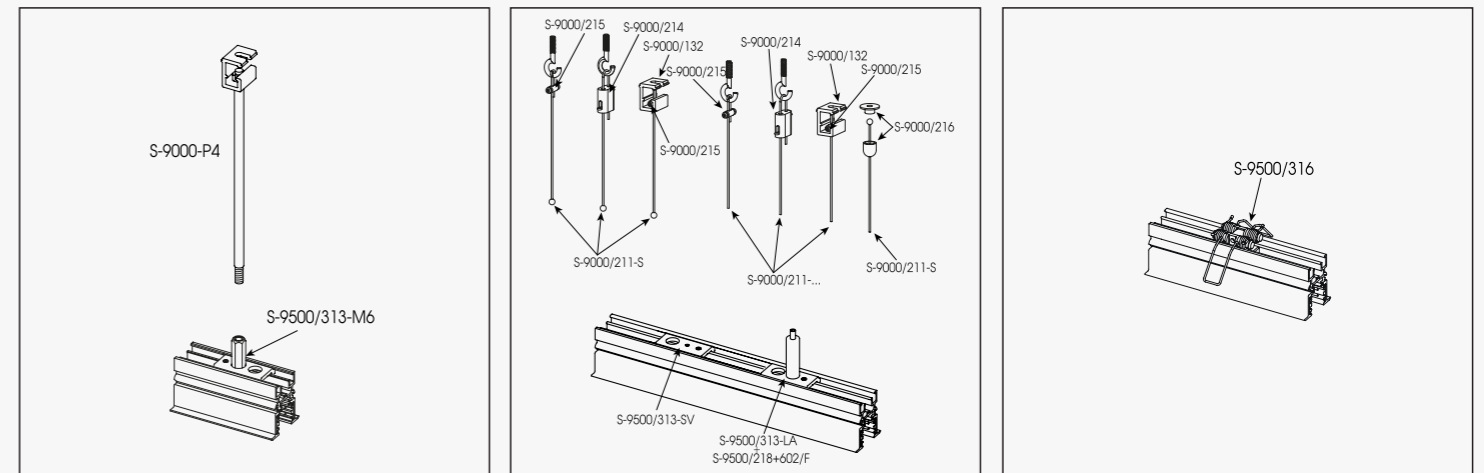

Suspension sets

Suspension accessories with track adjustment

Spring fixing

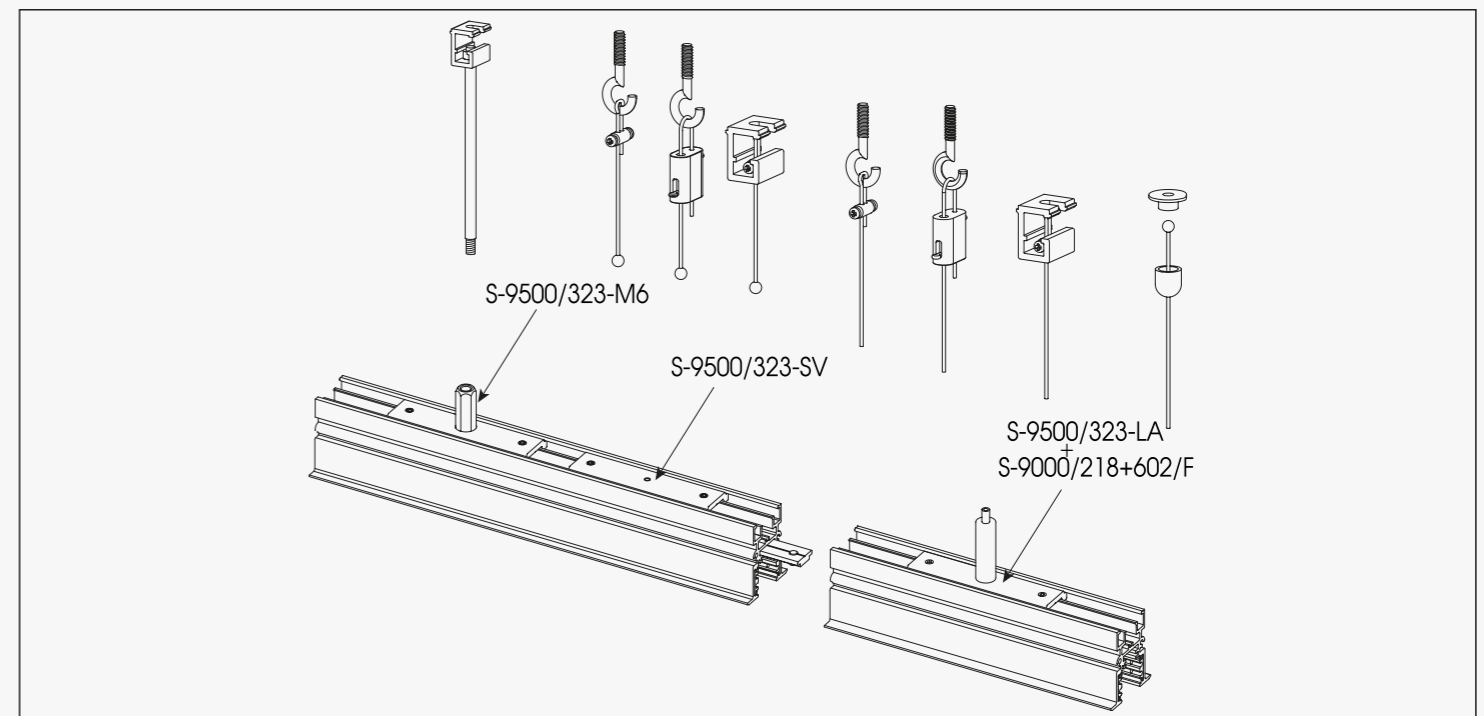

Accessories for „in row“ use junctions



TRIMLESS
recessed

Available colours: **W** White RAL 9010 **W2** White RAL 9016
B Black RAL 9005 **Raw** Raw aluminium



9500-.../...-ST5

9500-.../...-ST10

END CAP



9504/ST2-...
9504/ST2-...-F

Metal sheet end cap; ...-F: with hole for cable

W **W2** **B** Embossed

ST2

CLAMPS



S-9000-P2/117

Clamp in zinc plated steel. M6 threaded gripper in zinc plated steel

ST2



9504/ST2-...
9504/ST2-...-F

Clamp in painted steel. M6 threaded gripper in nickel-plated steel

B Raw

ST2

BRACKETS



S-9500/314-...

Reinforcing bracket for jointing connector

W2 **B**

ST3



S-9500/315

Bracket for trimless use

Raw

ST3

STEM



S-9000-1,2/604-...

Painted metal stem with M13X1 end + nut (L=1,2m)

W **W2** **B**

ST8

CEILING FIXING BRACKET



S-9000/132

Ceiling bracket for suspensions

ST8

SUSPENSION SETS



S-9000-P4


Includes:

- ceiling bracket
- M6 nut
- M6 threaded bar (L=1000mm)


Raw

ST2 ST6

ST5,ST10 TRACKS

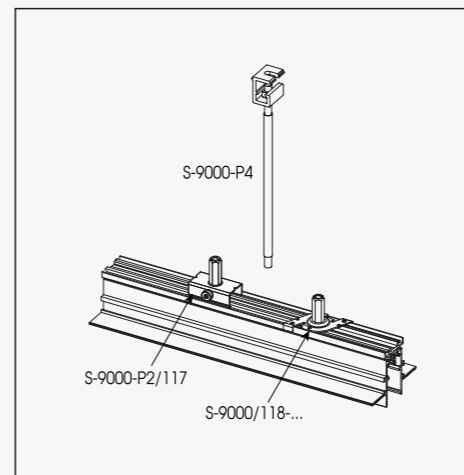

Suspension sets

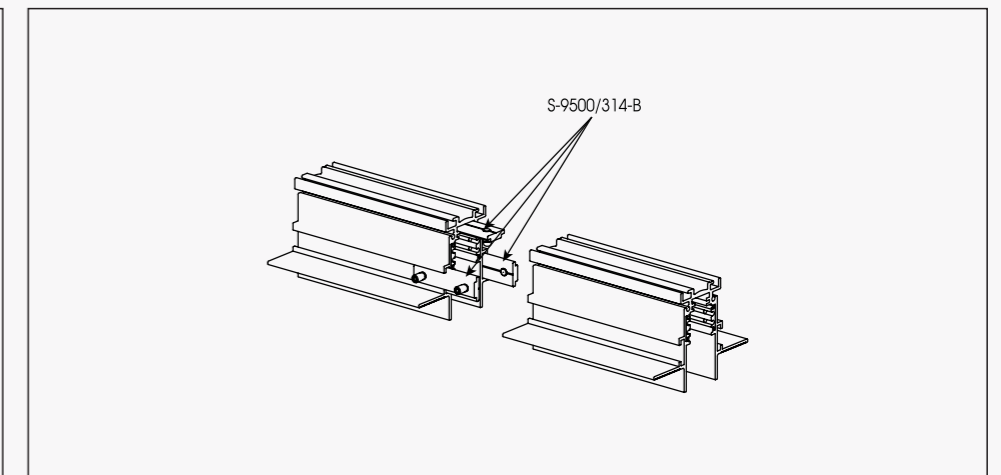

Accessories for „in row“ use junctions



UNIVERSAL
SUSPENSION ACCESSORIES

Available colours: **W** White RAL 9010 **W2** White RAL 9016
B Black RAL 9005 **RA** Raw aluminium



S-9000/214

Automatic lock

ST...



S-9511/316-LA

L bracket for angles

ST...



S-9000/215

Screw gripper

ST...



S-9000/211-...

Steel cable \varnothing 1,5mm
(...=L: 1,5/3/5m)

ST...



S-9000/218

Automatic M5 threaded gripper with side hole
(to be used with 602/F screw supplied separately)

ST...



S-9000/211-S-...

Steel cable with spherical end \varnothing 1,5mm
(...=L: 1,5/3/5m)


ST...



S-9000/216

Chrome plated brass round head ceiling

ST...



S-9000/T

Cutting tool for track conductors

ST...



S-9000/213

Automatic gripper with lock

ST...



ARTICLES TO BE USED IN POLARIZED VERSION

Available colours: **W** White RAL 9010 **W2** White RAL 9016
B Black RAL 9005 **RA** Raw aluminium



9501-KL/...

End feed - left

W **B**



9501-KL/...

End feed - left


W **B**



9501-KL/...

End feed - left

W **B**



9501-KL/...

End feed - left


W **B**



9501-KL/...

End feed - left

W **B**



9501-KL/...

End feed - left

W **B**



9501-KL/...

End feed - left

W **B**



9501-KL/...

End feed - left

W **B**



9501-KL/...

End feed - left

W **B**

Switching Power Supply



LRS-35

35W Single Output Switching Power Supply



LRS-50

50W Single Output Switching Power Supply



LRS-100

100W Single Output Switching Power Supply



LRS-200

200W Single Output Switching Power Supply



LIGHT CONTROL DEVICES



APP1-M-S0-9509/B

Adapter for wireless management and control of track lighting
Technology: A.A.G. STUCCHI

B




APP1-S-S0-9509/B

Adapter for wireless management and control of track lighting with occupancy sensor
Technology: A.A.G. STUCCHI

W B

FUNCTIONING SCHEME

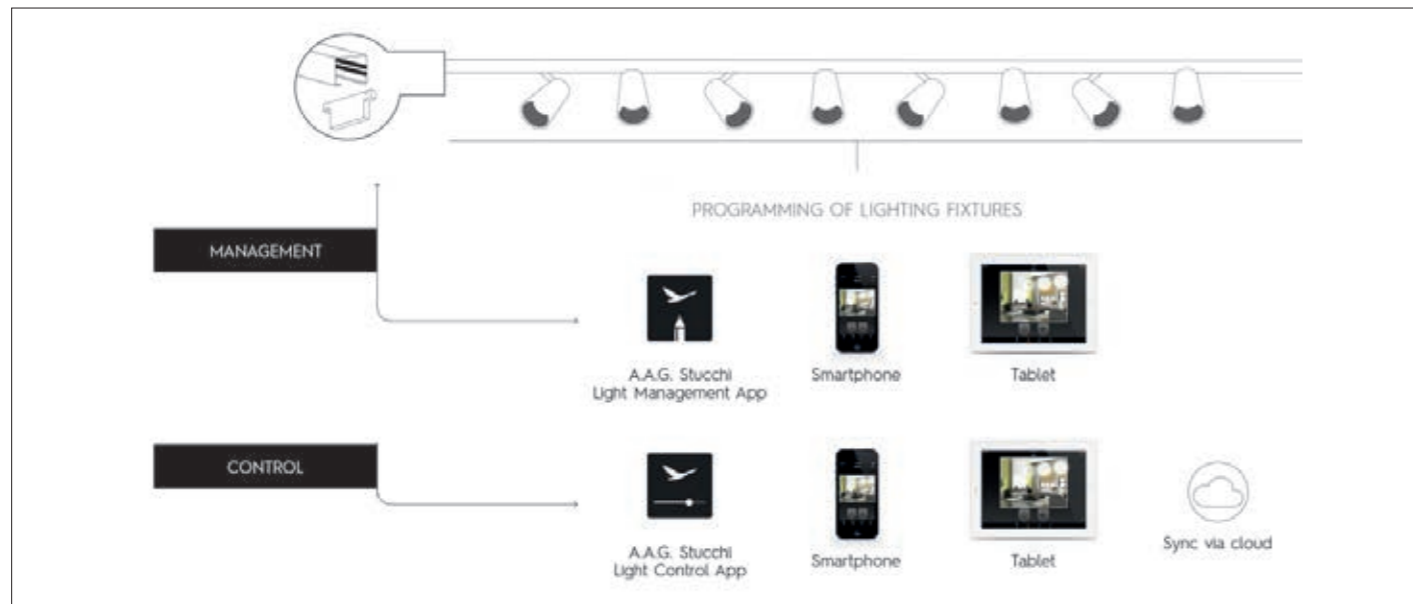

S-9511/ST2



Repeater to opto-insulate the DALI input signal

W

FUNCTIONING SCHEME



FINA TEHNO LED

JURIJA GAGARINA 192/24
11070 NOVI BEOGRAD
SRBIJA

TEL : +381 11 215 2232
MOB: +381 62 355 896
MOB: +381 62 355 894

E - MAIL : office@finatehnoled.com
WEB : www.finatehnoled.com